



(11) **EP 0 843 230 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**17.11.2004 Bulletin 2004/47**

(51) Int Cl.7: **G03G 15/00, G06F 11/22**

(21) Application number: **97307547.6**

(22) Date of filing: **25.09.1997**

(54) **Remote maintenance and servicing of a network peripheral device over the world wide web**  
**Fernwartung und -kundendienst für ein Netzwerkperipheriegerät über das weltweite Netz**  
**Entretien et service à distance par réseau mondial pour dispositif périphérique de réseau**

(84) Designated Contracting States:  
**DE FR GB IT**

(30) Priority: **15.11.1996 US 749637**

(43) Date of publication of application:  
**20.05.1998 Bulletin 1998/21**

(80) Divisional application:  
**04075372.5 / 1 450 542**

(73) Proprietor: **CANON KABUSHIKI KAISHA**  
**Ohta-ku Tokyo 146-8501 (JP)**

(72) Inventors:  

- **Kim, Joohee**  
**San Jose CA 95134 (US)**

- **Danknick, Dan**  
**San Jose CA 95134 (US)**
- **Kodimer, Marianne L.**  
**San Jose CA 95134 (US)**
- **Mahajan, Rakesh**  
**San Jose CA 95134 (US)**

(74) Representative:  
**Beresford, Keith Denis Lewis et al**  
**BERESFORD & Co.**  
**16 High Holborn**  
**London WC1V 6BX (GB)**

(56) References cited:  
**EP-A- 0 599 623 EP-A- 0 683 623**  
**GB-A- 2 301 980 US-A- 5 347 346**  
**US-A- 5 485 246**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Printed by Jouve, 75001 PARIS (FR)

**EP 0 843 230 B1**

1

EP 0 843 230 B1

2

**Description****BACKGROUND OF THE INVENTION****Field Of The Invention**

**[0001]** The present invention concerns performing remote maintenance and servicing of a network peripheral device over the World Wide Web or other network.

**Description Of The Related Art**

**[0002]** Traditionally, when a peripheral device, such as a copier, required manufacturer's maintenance or servicing, the end user contacted the company's technical support or servicing department which then dispatched a service technician to visit the user's site and service the device. In addition, in many cases a service technician would visit the user's site on a periodic basis to perform scheduled maintenance.

**[0003]** Thus, the traditional method of providing maintenance and service for a device ordinarily required a service technician to physically visit the site where the device is located. Moreover, several visits might be required if, upon the first visit, the technician discovered that he did not have with him one or more tools or parts to further diagnose or correct a discovered problem.

**[0004]** Accordingly, there has long existed a need to reduce the number of site visits required to be made by service technicians, and when a site visit is required, to provide the service technician with advance information regarding any problems that might exist.

**[0005]** Point-to-point modem connections have been used in the past to accomplish some of these goals. However, installing a modem in the peripheral device is many times redundant, as most large organizations maintain modem bank servers on their LANs. Additionally, such a technique requires the peripheral device to have access to an available analog phone line, which is often difficult to find large companies.

**[0006]** EP-A-0663823 discloses a graphics imaging device connected to a telephone network via a modem. The device is able to download machine parameters or transmit error logs to a field service computer connected to the telephone network via a second modem. The imaging device receives a command to enter a service mode, a further command being effective to restart the imaging device in its normal operational mode. The field service computer uses specialised software to communicate with the imaging device.

**[0007]** US-A-5347348 discloses a photocopier connected to a service centre through a telephone line. A serviceman at the service centre transmits adjustment command signals to the photocopier through the telephone line used by the device to set a value determining image quality, the device sending information indicating the resultant altered set value.

**[0008]** US-A-5485246 discloses a control system for

collectively supervising a plurality of copiers. In particular, the system is arranged to enable the copiers to be set with identical data. The copiers are connected to control device via a telephone network. Data is downloaded and uploaded to and from the copiers including error data produced by self diagnosis of the copiers.

**SUMMARY OF THE INVENTION**

**[0009]** It is therefore an object of the present invention to address the foregoing difficulties by providing methods and apparatuses by which certain servicing and maintenance of a network peripheral device can be performed remotely, such as from a centralized service organization of a device manufacturer, over a network, such as the World Wide Web. By providing servicing and maintenance according to the present invention, the number of site visits required to accomplish those tasks can be reduced, and in the event that a site visit is still deemed necessary, problems with the network peripheral device can be discovered in advance, enabling the service technician to better prepare to repair the problem. As used herein, a "network peripheral device" means a peripheral device together with a network board for communicating over a network.

**[0010]** According to a first aspect of the present invention, there is provided a method for controlling a peripheral from a remote apparatus over a network characterized in that the peripheral has a server and a connection to the network, and the remote apparatus has a web browser and a connection to the network, and the method performed at the remote apparatus comprises the steps of: sending packet data from the remote apparatus over the network to the peripheral including a request to provide function information showing one or a plurality of functions for service or maintenance of the peripheral; receiving at the remote apparatus packet data from the peripheral over the network, the packet data including data presenting the function information from the server to the browser; causing the browser to display function information at the remote apparatus in accordance with the received data; and in response to user selection from the displayed function information, sending packet data from the remote apparatus over the network to the peripheral, the packet data including a request to perform the selected function of the peripheral, wherein the selected function is performed at the peripheral.

**[0011]** According to a second aspect of the present invention, there is a method for obtaining instruction on a peripheral from a remote apparatus over a network, characterized in that the peripheral has a server and a connection to the network, and the remote apparatus has a web browser and a connection to the network, and that the method performed at the peripheral comprises the steps of: receiving at the peripheral packet data from the remote apparatus over the network, the packet data including a request to provide function information

3

EP 0 843 230 B1

4

showing one or a plurality of functions for service or maintenance of the peripheral; sending packet data from the peripheral over the network to the remote application, the packet data including data presenting the function information from the server to the browser to enable the browser to display the function information at the remote apparatus in accordance with the data; receiving at the peripheral packet data from the remote apparatus over the network, the packet data including a request to execute the function selected from the function information; and in response to the second request to execute the selected function, executing the selection function at the peripheral.

[0012] According to a third aspect of the present invention, there is provided an apparatus for obtaining instruction for a peripheral from a remote apparatus over a network, the apparatus being characterized in having a server and a connection to the network, the remote apparatus having a web browser and a connection to the network, the apparatus for obtaining instruction further comprising: receiving means for receiving packet data over the network, the packet data including a request to provide function information showing one or a plurality of functions for service or maintenance of the peripheral; sending means for sending data over the network, the packet data including data presenting function information from the server to the browser to enable the browser to display the function information at the remote apparatus in accordance with the data presenting function information; receiving means for receiving packet data over the network, the packet data including a second request to execute a function selected from the function information; and controlling means for, in response to the second request, controlling the peripheral to execute the selected function.

[0013] This brief summary has been provided so that the nature of the invention may be understood quickly. A more complete understanding of the invention can be obtained by reference to the following detailed description of the preferred embodiments thereof in connection with the attached drawings.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0014]

Figure 1 is a diagram of a network architecture of an embodiment of the present invention.

Figure 2 is a diagram showing the physical layout of components on a network board of an embodiment of the present invention.

Figure 3 is a functional block diagram of the network board.

Figure 4 is a perspective view showing the outward appearance of a workstation of an embodiment of the present invention.

Figure 5 is a block diagram of a user's workstation.

Figure 6 is a block diagram of a technical support

operator's workstation.

Figure 7 is a copier home page as displayed by an Internet browser.

Figure 8 is an HTML file corresponding to the copier home page of Figure 7.

Figure 9 is an HTML file corresponding to a Tab Frame of the copier home page of Figure 7.

Figure 10 is an "Administration" web page as displayed by a browser.

Figure 11 is an HTML file corresponding to the "Administration" web page of Figure 10.

Figure 12 is a Technical Support server home page as displayed by a browser.

Figure 13 is a flowchart for describing process steps to create an SNMP client in a workstation and to reboot a copier via the SNMP client.

Figure 14 is a flowchart for describing process steps to send copier information to a technical support organization.

Figure 15 is a flowchart for describing process steps to send copier information to a technical support organization.

Figure 16 depicts a Web page for providing servicing information generated by a network copier in response to a service organization request.

Figure 17 depicts a Web page showing maintenance and diagnostic functions available to be executed by a network copier.

Figure 18 is a flowchart for describing a method for performing remote maintenance and servicing of a network copier over the Internet.

Figure 19 depicts a service request page automatically generated by a network copier in response to a detected condition.

Figure 20 is a flowchart for describing a method by which a network peripheral device may send an automatic service request over an IP-network.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[Network Architecture]

[0015] Figure 1 is a diagram of a network architecture which can be used to implement an embodiment of the present invention. Included in Figure 1 is Network Interface Board (NIB) 14, an example of which is described in U.S. Patent Application No. 08/409,034, filed March 23, 1995, entitled "Network Interface Board For Digital Copier". The NIB 14 is coupled to a copier 11 having an open architecture through a Multi-Device Controller (MDC) 12. In a preferred embodiment, the copier 11 is a Canon GP-55 or other copier capable of establishing a robust interface with NIB 14. The NIB 14 is also coupled to a local area network (LAN) 15 through a LAN interface, for example, an Ethernet interface 10Base-2 with a Coax connector or 10Base-T with an RJ-45 connector. Alternatively, the present invention may utilize a

5

EP 0 843 230 B1

6

LAN conforming to a Token-ring architecture.

[0016] Plural workstations, such as workstations 9 and 16, are also connected to the LAN 15, and under control of the network operating system these workstations are able to communicate with the NIB 14. One of the workstations, such as workstation 9, may be designated for use as the network administrator.

[0017] In addition, workstations 9 and 16 may each comprise a standard workstation capable of generating data files, transmitting them onto the LAN 15, receiving files from the LAN 15, and displaying and/or processing such files. A workstation may also have a printer connected directly to it.

[0018] Printers 10 and 17 are connected to the LAN 15 respectively through a Network Expansion Device (NED) 13 and a Network Expansion Board (NEB) 18 (examples of which are described in co-pending U.S. Patent Application No. 08/489,116, filed June 9, 1995, entitled "Outputting a Network Device Log File"), respectively. Other unshown peripherals may also be connected to the LAN 15.

[0019] Typically, a LAN services a fairly localized group of users such as a group of users on one floor or contiguous floors in a building. As users become more remote from one another, for example, in different buildings or different states, a wide area network (WAN) (not shown) may be created which is essentially a collection of several LANs all connected by high speed digital lines, such as high speed integrated services digital network (ISDN) telephone lines.

[0020] Figure 1 shows that LAN 15 is connected to the World Wide Web 6 via a router 7. Accordingly, LAN 15 must support data packets transmitted according to the TCP/IP network protocol (IP-packets). Each IP-packet includes a destination field indicating the network address of the intended recipient, a source field indicating the network address of the sender, a data field, a field indicating the length of the data field, and a checksum field for error detection. Although the invention is described with respect to IP communications, it should be understood that the invention can be implemented using other communication protocols as well.

[0021] The router 7 primarily provides the LAN 15 with Web monitoring functions, routing IP-packets intended for devices on LAN 15 to the LAN 15 and discarding all others, and placing IP-packets generated by devices on LAN 15 onto the Web 6.

[0022] Also connected to the Web 6 are router 2 which provides workstations 1 and 3 with access to the Web 6 and router 5 which provides workstations 4 and 8 with access to the Web 6. In the present invention, workstations 1 and 3 are connected to a Technical Support organization LAN 19 and workstations 4 and 8 are connected to a Sales organization LAN 20. Similarly, the workstation 4 is located at the Sales center responsible for providing accessories to the GP-55 copier 11.

[0023] A preferred embodiment of the present invention is described below in the context of IP communica-

tions among workstations 1 and 9, each of which includes a network expansion board (not shown) for generating IP-packets, and copier 11 which utilizes NIB 14 to generate IP-packets. However, the present invention is not limited to using the foregoing hardware. For example, the invention could also be implemented by using a network expansion device, such as NED 13, a network expansion board, such as NEB 18, provided a robust peripheral to network board interface can be established. Similarly, other peripheral devices could be substituted for copier 11, and a variety of processing devices could be substituted for workstations 1 and 9.

[Network Interface Board]

[0024] Broadly speaking, the NIB 14 is an interactive network device which couples the copier 11 to the LAN 15, making the copier 11 a responsive and interactive network member. The NIB 14 receives copy data, status requests, and control commands from the LAN 15, transmits copy data, status requests, and control commands to the copier 11 for execution, and transmits status information back to the LAN 15. Thus, the NIB 14 can perform not only remote copying services and copy server functionalities, but can also offer to network members whatever status and control features are available from the peripheral interface.

[0025] Figure 2 is a view showing the physical layout of components on the network interface board 14. As shown in Figure 2, the NIB 14 includes, all mounted on a PCB (printed circuit board) 21, a microprocessor 22 such as an Intel 80486-DX2 microprocessor for controlling all functions on the NIB 14, a PC-AT chipset 24 which includes logic circuitry specific to the NIB 14 for controlling and monitoring various functions on the NIB 14, such as monitoring address and data buses and issuing chip select commands, a network controller 25 such as an Ethernet controller for managing access to the local area network, and three network connectors 26, 27 and 29 for connecting to any of the standard network wiring such as T-base 10, T-base 10 and AUI. The microprocessor 22 is provided with a minimum of 4 MB of dynamic RAM (DRAM) via the SIMM sockets 30, which can accept up to 64 MB of DRAM. A dual port RAM 31 is provided to communicate with the MDC 12 via a connector 32.

[0026] The microprocessor 22 is also provided with access to EPROM 34 for persistent storage. Two option slots 35 and 36 respectively, which are controlled by a PCMCIA interface controller 37 are provided for PCMCIA type 2 expansions by which it is possible to equip the NIB 14 with a variety of additional peripherals such as a modem, an ArcNet interface, and the like.

[0027] Access to the MDC's video bus is provided via a video bus connector 38 which is controlled by a video interface gate array 39. Gate array 39 has access to a minimum of 1 MB of video RAM (VRAM) which is expandable up to 32 MB of DRAM via a SIMM socket 40.

7

EP 0 843 230 B1

8

[0028] Status lights 41 are provided for a user to monitor internal status flags of the NIB 14. In addition, two data interface ports are provided: a bi-directional parallel port 42 so as to permit connection to a bi-directional data device such as a stand-alone computer, and an RS-232 serial port 44 so as to support serial communication such as for debug purposes.

#### [Network Interface Board Software]

[0029] Figure 3 illustrates examples of blocks of code, or software modules, that are utilized by the NIB 14. The XP module 51 provides a standardized interface between the copier 11 and the NIB 14. A MLID (Multi Link Interface Driver) 68 is a piece of code (Media Support Module, or MSM) linked together with a piece of customized code (Hardware Support Module, or HSM) that is the lowest level of connection to the LAN 15. The LSL (Link Support Layer) 63 is a piece of code that acts as a multiplexer between the low level MLID 68 and the TCP/IP protocol stack 56, the Novell IPX protocol stack 57, the Appletalk protocol stack 59 and the NetBIOS protocol stack 60 above it.

[0030] The Protocol Independent Interface (PII) module 61 provides a single interface for communication via the various supported protocols. Because the NIB 14 supports multiple protocol stacks, this module exists as long as the NIB 14 is running. Flash server 62 is used to reprogram EPROM 34. PII module 61 works in conjunction with flash server 62 to monitor and support the various protocol stacks.

[0031] The NIB 14 also supports a Hyper Text Transfer Protocol ("HTTP") server 64 which enables workstations 9 and 16 of the LAN 15 to access the NIB using a web browser which supports World Wide Web protocol. Accordingly, the NIB 14 also contains files which may be passed to such a web browser according to HTTP protocol, such as Hyper Text Markup Language ("HTML") files, JAVA applets, or Graphics Interchange Format ("GIF") files. JAVA applets are platform-independent segments of executable code which are designed to run behind an applet-enabled web browser on a workstation using a JAVA Virtual Machine ("JVM").

[0032] In addition, the NIB 14 provides the copier 11 with a Simple Network Management Protocol ("SNMP") agent 55. SNMP agents are widely used to exchange monitoring and control data between network peripherals and network workstations. The agent 55 returns information contained in a Management Information Base 54, which is a data structure that defines what information can be obtained from the copier 11 and what aspects of the copier 11 can be controlled. The NIB 14 includes an PJI/RPC Interpreter 52 to interface between the SNMP agent 55 and the XP interface 51.

#### [Workstations]

[0033] Figure 4 is a view showing the outward appearance of a representative embodiment of a workstation utilizing the present invention. Shown in Figure 4 is a workstation 9, such as a Macintosh or an IBM PC or PC-compatible computer having a windowing environment, such as Microsoft Windows. Provided with the workstation 9 is a display screen 70, such as a color monitor, a keyboard 77 for entering user commands, and a pointing device 76, such as a mouse, for pointing to and for manipulating objects displayed on the screen 70.

[0034] The workstation 9 includes a mass storage device such as a computer disk 74 for storing data files. The workstation communicates to other external devices via a facsimile/modem interface 71. Such external devices might include an internet service provider for providing alternate connection means to Web 8. A printer 75 is provided for hardcopy output.

[0035] Figure 5 is a detailed block diagram showing the internal construction of the workstation 9. As shown in Figure 5, the workstation 9 includes a central processing unit (CPU) 81 interfaced with a computer bus 80. Also interfaced with the computer bus 80 is a printer interface 82, a network interface 84, a fax/modem interface 85, a display interface 86, a keyboard interface 90, a mouse interface 91, a main memory 87, and a fixed disk 74. Disk 74 stores a JAVA-enabled web browser, a Windows Operating System and various Windows applications. The web browser communicates to the LAN 15 and to the World Wide Web 8 through a network interface 72. The main memory 87 interfaces with the computer bus 80 so as to provide random access memory storage for use by the CPU 81 while executing stored process steps such as those of the web browser. More specifically, the CPU 81 loads those process steps from the disk 74 into the main memory 82 and executes those stored process steps out of the main memory 82.

[0036] Figure 6 is a block diagram of the Technical Support workstation 1. The workstation of Figure 6 is comprised of the same general components as the workstation of Figure 5 with the exception of the data stored on the disk 109. In particular, the disk 109 contains an HTTP server, HTML files, GIF files and JAVA applets, in addition to a Web browser.

[Method and Apparatus for Communicating with A Network Peripheral]

[0037] Figure 7 is a home page 120 of the HTTP server 64 located on the NIB 14, as displayed by a browser on the display 70. The page 120 includes a Tab Frame 121, a Viewer Frame 122 and an External Link Frame 124.

[0038] The Tab Frame 121 includes icons 126 representing other HTML pages which are available from the HTTP server 64. As will be discussed below, the Tab Frame 121 is a fixed component of the copier web pages, therefore the Tab Frame icons 126 are available from any page provided by the HTTP server 64.

[0039] The External Link Frame 124 includes icons

125 which provide access to the HTTP servers located within workstations 1 and 4. Like the Tab Frame icons 128, these icons 125 are available from any page provided by the HTTP server 64.

[0040] Figure 8 is a hardcopy of an HTML file 130 corresponding to the copier home page 120. The file contains hypertext tags 131, 132 and 134, which are links to HTML files corresponding to the Tab Frame 121, the Viewer Frame 122 and the External Link Frame 124, respectively.

[0041] Figure 9 is a hardcopy of an HTML file 140 corresponding to the Tab Frame 121. The file 140 contains a tag 141 directing a browser to display the user options, which will be confined to the left side of the browser display area, as defined by the home page HTML file 130. More importantly, the file 140 contains an applet tag 142, which refers to a JAVA applet located on the HTTP server 64. The browser, when processing the file 140, requests the applet from the HTTP server 64 upon encountering the applet tag 142. The Tab Frame applet waits for user action on the Tab Frame 121 and responds with appropriate actions.

[0042] Figure 10 is an "Administration" HTML page 150 downloaded from the HTTP server 64, as displayed within a browser. Current configuration settings are displayed in fields such as fields 152, 154 and 155 using an applet downloaded from the HTTP server 64. The settings are obtained by an SNMP client within the workstation from an SNMP agent 68 within the HTTP server 64. Furthermore, the page 150 contains icons 151 which, when selected, cause administrative functions to be executed within the copier 11.

[0043] Figure 11 is an HTML file 160 corresponding to the "Administration" web page 150. The file contains applet tags 161, 162 and 164, which, when encountered by a browser, cause corresponding applets to be downloaded from the HTTP server 64 and executed. Upon execution, these applets present icons 151 to a user and monitor the icons 151 for user selection. If an icon 151 is selected, the corresponding applet, which has been waiting for such a selection, executes the corresponding administrative function within the copier.

[0044] Figure 12 is a home page of a Technical Support server 1 as displayed by a browser. The page 170 contains fields 171 and 172 which may be completed dynamically via JAVA applets downloaded from the Technical Support server 1 or from the HTTP server 68. Alternatively, these fields may be completed manually by a user. In any case, the data in these fields is converted to CGI format and sent in an IP packet to the Technical Support server 1 upon user selection of "submit" icon 174.

[0045] Figure 13 is a flowchart for describing process steps to create an SNMP client in a workstation and to reboot a copier via the SNMP client. Generally speaking, the process steps of Figure 13 provide communication between a web browser capable of initiating execution of a platform-independent segment of executable

code and a peripheral having an HTTP server and an SNMP agent. A first IP-packet is transferred to the HTTP server, and, in response, an HTML file is transmitted to the web browser. The HTML file contains a reference to a platform-independent segment of executable code. Upon processing the HTML file, this code segment is requested from the HTTP server.

[0046] After the web browser receives the executable code from the HTTP server, execution of the code segment is initiated in order to create an SNMP client. Execution of the code segment also causes an IP-packet to be sent from the SNMP client to the SNMP agent in the peripheral. In response to this IP-packet, information concerning the peripheral is transferred from the SNMP agent to the SNMP client.

[0047] More particularly, in step S1301, a web browser executing within a workstation 9 obtains an IP address of an HTTP server 64 corresponding to a network copier 11. The web browser may be any JAVA-enabled browser, such as Netscape's Navigator® 3.0, Microsoft's Internet Explorer® 3.0 or the like. Furthermore, the IP address may be obtained in several ways.

[0048] First, a user may input the IP address directly into the appropriate area of the browser's graphical user interface. Alternatively, the browser may obtain the IP address using a name which corresponds to a World Wide Web home page located within the HTTP server 64 of the network copier 11. According to this alternative, the name is sent in an IP packet from the web browser to a domain name server, which returns the home page's IP address to the web browser.

[0049] Next, in step S1302, the web browser sends an IP packet containing the returned IP address to the router 7, which routes the packet to the HTTP server 64. In response to the IP packet, the HTTP server 64 sends an HTML file to the browser in step S1304. In step S1305, the web browser processes and displays the HTML file in accordance with hypertext tags contained in the file.

[0050] As shown in Figures 7 to 9, the hypertext tags provide page formatting information to the browser which defines text areas, graphics areas or JAVA client areas. For example, upon processing HTML file 130, the browser is instructed by hypertext tag 131 to display a second HTML file 140 at the left side of the displayed page 120. This HTML file 140 represents Tab Frame 121. Further, hypertext tag 132 instructs the browser to display a third HTML file on the right side of the displayed page 120. The third HTML file represents the Viewer Frame 122 and is dynamically created by the HTTP server 64 so that it presents the current status of the copier when displayed.

[0051] In the case that a browser encounters a graphics tag which designates an image to be displayed, the browser retrieves the image according to the location provided in the tag and displays the image in the browser display area designated by the tag. Similarly, in the case that a browser encounters a JAVA applet tag, the

11

EP 0 843 230 B1

12

browser retrieves the segment of JAVA applet code according to the location provided in the tag and, also according to the tag, reserves a client area of the display area in which the JAVA applet may display data. The browser then initiates a JAVA Virtual Machine ("JVM") to execute the applet.

[0052] In step S1306, because the browser encounters a JAVA applet tag 142 while processing the HTML file 140 corresponding to the Tab Frame 121, the browser sends an IP packet to the HTTP server 64 requesting the referenced applet. Accordingly, in step S1307, the HTTP server 64 returns the applet to the browser.

[0053] The browser, in step S1309, initiates a JAVA Virtual Machine in order to execute the JAVA applet. The applet is executed in step S1310, thereby creating an SNMP client in the workstation 9 and waiting for user selection of one of the icons 126 displayed in the Tab Frame 121.

[0054] In step S1311, the user, using the mouse 76, selects the "Admin" icon displayed in the Tab Frame 121. The "Admin" icon is a hypertext link to the "Admin" page located on the HTTP server 64. Therefore, the browser, in step S1312, sends an IP packet to the HTTP server 64 requesting the "Admin" page's HTML file 160, shown in Figure 10. The server 64 sends the HTML file 160 to the browser in step S1314.

[0055] In step S1315, the browser processes the HTML file 160 according to its hypertext tags, which instruct the browser to display the file in the Viewer Area 122. The browser also reserves client areas 152, 154 and 155 according to the HTML file's applet tags 165. Also in accordance with the applet tag 165, the browser requests the referenced applet from the HTTP server 64 in step S1318. The HTTP server transfers the applet to the browser in step S1317.

[0056] In step S1319, the JVM executes the applet to obtain information from the copier 11 using the SNMP client created in step S1310. In particular, the JVM instructs the SNMP client to send an IP packet requesting copier information to the SNMP agent 68 within the network copier 11. The SNMP client then sends the IP packet to the SNMP agent 68 using the IP address obtained in step S1301. However, the SNMP agent has a different socket number than that of the HTTP server 64. Accordingly, the SNMP client simply sends the IP packet to the IP address obtained in step S1301, along with a reference to the SNMP agent's socket.

[0057] In response to the IP packet, the SNMP agent 68 returns the requested copier information, using SNMP protocol, to the SNMP client. The JVM then displays the information in the appropriate areas 152, 154 and 155 of the "Admin" page 150.

[0058] In step S1320, after the "Admin" page 150 and corresponding copier information have been displayed, the user selects the "Reboot The Copier" icon 151. The "Reboot" and "Upgrade Firmware" icons 151 are not hypertext links, rather, these icons are displayed by JAVA applets 181, 182 and 184. Accordingly, in step S1321,

once selected the applet which displays the "Reboot" icon 151 is executed so as to cause the SNMP client to instruct the SNMP agent 68 to reboot the copier 11.

[0059] It should be noted that the preceding steps S1311 to S1321 are described with respect to the "Admin" page 150 only to provide an example of its functionality, and that any copier information pages may employ similar functionality.

#### 10 [Accessing Peripheral Web Pages Via Hypertext Links]

[0060] In one aspect, flow proceeds from step S1321 to step S1424. In step S1424, the user, using the mouse 76, selects the "Support" icon displayed in the External Link Frame 124 of the "Admin" page 151. Next, in step S1425, the browser sends an IP packet to a Technical Support server 1 requesting the server's home page 170. The Technical Support server's IP address is obtained either directly from the currently displayed HTML file or according to the Technical Support server's domain name, as described above with respect to step S1201.

[0061] In step S1426, the Technical Support server 1 returns an HTML file to the browser, which in turn displays a home page 170 corresponding to the HTML file. The home page 170 contains HTML tags which instruct the browser to display, in step S1427, the page 170 within the Viewer Frame 122 of the browser display. The page 170 contains user input fields 171 and 172.

[0062] If, in step S1429, the browser encounters any applet tags within the Technical Support HTML file, flow proceeds to step S1430, in which the browser retrieves the referenced applets from the Technical Support server 1. Next, in step S1431, the JVM executes the applets in order to obtain copier information via the SNMP protocol and to fill in the appropriate copier information fields 171 and 172 the page 170 with the copier information.

[0063] The applets which allow the SNMP client to retrieve copier information are downloaded only when first encountered. Thereafter, in the case that the user revisits the page, the applet can be executed immediately and thereby can update the page quickly. In contrast, PhaserLink requires an HTTP server to rescript an HTML file in accordance with copier status each time a page corresponding to the file is summoned by a browser.

[0064] Flow proceeds from step S1431 to step S1432. If, in step S1429, no applet tags are encountered, flow also proceeds to step S1432.

[0065] In step S1432, the user manually inputs data into user input fields 171 and 172. The web browser converts this data into CGI format in step S1434. Thereafter, in step S1435, the browser sends a new IP packet to the Technical Support server which is identical to the packet sent in step S1425 except that the new packet also contains the CGI-formatted data. The process steps of Figure 14 terminate in step S1436.

#### [Accessing Peripheral Web Pages Via Peripheral Applets]

[0066] In another aspect, flow proceeds from step S1321 to step S1524, wherein the "Support" icon 125 displayed in the External Link Frame 124 is not a hyper-text link to a Technical Support server 1, rather, the icon is displayed by a JAVA applet retrieved from the HTTP server 64 upon processing the External Link Frame HTML file. In step S1524, the user selects this icon 125.

[0067] In accordance with the applet, the JVM instructs the browser to access a Technical Support server in step S1525. In step S1526, the browser issues an IP packet in order to obtain the Technical Support server's home page 170. The Technical Support server's IP address may be obtained through either method described above with respect to step S1425.

[0068] In step S1527, the Technical Support server 1 returns an HTML file which defines the Technical Support server's home page 170. The HTML file instructs the web browser to display the home page 170 in the Viewer Frame 122 of the browser display. The home page 170 also contains areas for inputting copier information. Accordingly, in step S1529, the JVM executes the "Support" applet in order to obtain copier information from the SNMP agent 68 via the SNMP client, as described in view of step S1319. Then, in step S1530, the JVM executes the applet so as to input the copier information into the appropriate areas of the page 170.

[0069] As mentioned above, the applets which allow the SNMP client to retrieve copier information are downloaded only once. If the user revisits the page, the applet is executed immediately and the page is updated quickly. In contrast, PhaserLink requires an HTTP server to rescript an HTML file in accordance with copier status each time the file is requested by a browser.

[0070] If necessary, in step S1531, the user manually inputs user information into user input areas of the page 170. In step S1532, the user selects a "Submit" icon (not shown) in the home page 170. In response, the applet instructs the browser to convert the information input into the page 170 into CGI format in step S1534. Next, in step S1535, the browser sends an IP packet to the Technical Support server 1. The IP packet is identical to the packet sent to the server 1 in step S1526 except that the packet also contains the CGI-formatted information.

[0071] It should be noted that the applet may be used to obtain any data via the SNMP agent and to convert that data into CGI format for delivery to the Technical Support server, whether or not the data is displayed to the user.

[0072] In addition, although JAVA applets have been described, it should be understood that the process steps of Figures 13 to 15 may be used in conjunction with any code which is retrievable and executable via a web browser.

#### [Remote Maintenance and Servicing of Network Peripherals]

[0073] Figure 16 depicts a Web page for providing servicing information generated by a network copier in response to a service organization request. General servicing information 180 is provided for the service technician's review. In addition, links 181 through 184 can be selected by the technician to bring up additional copier servicing pages. For example, in the event link 184 is selected, the page depicted in Figure 17 is retrieved.

[0074] Figure 17 depicts a Web page showing maintenance and diagnostic functions available to be executed by a copier 11. When any of buttons 190 are selected and then the send button 192 is selected, network copier 11 performs the corresponding diagnostic or maintenance functions. In addition, by selecting any one of links 194, the corresponding page can be retrieved.

[0075] Figure 18 is a flowchart illustrating a process steps for performing remote maintenance and servicing of copier 11 over the internet by a service technician working at workstation 1.

[0076] In general, according to the process steps in Figure 6, a first IP-packet sent from a remote service organization is received by a network peripheral device via the IP-network, the first IP-packet including a request for servicing information from the network peripheral device. Next a second IP-packet is sent automatically upon receipt of the first IP-packet from the network peripheral device to the remote service organization via the IP-network, the second IP-packet including the requested peripheral servicing information. Thereafter, a third IP-packet sent from the remote service organization to the network peripheral device via the IP-network is received by the network peripheral device, the third IP-packet including an instruction to execute a peripheral servicing function. Finally, the peripheral servicing function is executed by the network peripheral device automatically in response to the third IP-packet.

[0077] More particularly, in step S1801, a service technician operating workstation 1 initiates contact with copier 11 by causing workstation 1 to prepare and send an IP-packet to NIB 14 coupled to copier 11. The IP-packet contains a request for servicing information from network copier 11.

[0078] In the following description, the service technician runs a Web browser on workstation 1, and NIB 14, connected to copier 11, includes an HTTP server which is set up to provide HTML files related to maintenance communications. Accordingly, the service technician can initiate contact with copier 11 by merely entering the address of the maintenance and servicing Web page of copier 11 into the browser and executing the browser. Similarly, it is expected that data will be returned in HTML file format. However, it is to be understood that the data format used is not limited to HTML.

[0079] Once generated, the IP-packet is sent from



15

EP 0 843 230 B1

16

workstation 1 to NIB 14 successively via router 2, world wide web 6, router 7 and LAN 15, as described in more detail above. NIB 14 then unpacks the IP-packet and passes the data contained in it to copier 11 via XP interface 51.

[0080] In step S1802, copier 11 receives and evaluates the request to determine what data is required to be sent.

[0081] In step S1804, based on the evaluation in step S1802, copier 11 then retrieves and outputs the data to NIB 14. NIB 14, in turn, then includes the received data in an HTML file using one of the stored HTTP files 65 and its HTTP server 64, and includes the HTML file in an IP-packet. The generated IP-packet, which includes in its destination field the address of workstation 1, is then sent from NIB 14 to workstation 1 successively via LAN 15, router 7, World Wide Web 6 and router 2.

[0082] In step S1805, the IP-packet is received by workstation 1. The HTML page, including the data provided by copier 11, within the packet is then displayed by the Web browser according to the instructions sent. For example, the initial contact would typically have constituted a request to view a general servicing information page of copier 11 illustrated in Figure 16. As depicted in Figure 16, the Web page 100 contains general servicing information 180 and links 181 through 184 to other pages. The service technician evaluates the displayed data to determine how to proceed next.

[0083] In step S1806, if the service technician determines that additional servicing information is required, flow returns to step S1801 to request such additional information. The specific servicing information requested might depend upon the service technician's original motivation for initiating contact with copier 11 and any previous information obtained from copier 11. For example, the technician might request more general information when initially performing scheduled maintenance than when the technician has been alerted to the existence of a specific problem.

[0084] Such requests for additional servicing information could be initiated, for example, by using mouse 78 to click on any of links 181 through 184 to select the desired page, which in turn might contain links to other pages. If no additional servicing information is required at this time, flow proceeds to step S1807.

[0085] In step S1807, the service technician determines whether any diagnostic or maintenance functions should be run on copier 11. If, for example, either: (i) no problem exists, (ii) the identified problems have been corrected, or (iii) the problem requires a site visit and all relevant available data has already been obtained, the technician will generally decide not to instruct execution of any additional functions. In that event, the process ceases. However, if one or more maintenance or diagnostic functions are desired to be executed, flow proceeds to step S1809.

[0086] In step S1809, the service technician clicks on link 184 to retrieve the available function page illustrated

In Figure 17, showing the maintenance and diagnostic functions available for copier 11. Upon clicking on any of buttons 190 and then send button 102, workstation 1 sends to copier 11 an IP-packet containing instructions to execute the series of functions selected in the order selected.

[0087] In step S1810, copier 11 receives the data contained in the IP-packet and executes the functions described.

[0088] In step S1811, copier 11 obtains information relating to the functions performed, and then copier 11 in connection with NIB 14 sends that information via an IP-packet containing HTML page update instructions to workstation 1. Thereafter, flow proceeds to step S1805 where the service technician evaluates the information, and determines whether additional servicing information is required or additional maintenance or diagnostic functions should be run.

[0089] As mentioned above, various data formats other than HTML might be used to implement the Internet communications between workstation 1 and copier 11 described above. For example, rather than sending a complete Web page, the network peripheral could send only the relevant data, relying on the receiving station to format the information for display.

[0090] Rather than executing a Web browser, workstation 1 could instead execute software specifically designed for communicating with copier 11. In this event, graphical formatting instructions and menus of information available from copier 11 are provided in part or in whole by means of software internal to workstation 1, rather than exclusively by copier 11, as described in the steps above. Accordingly, in this case it is unnecessary to perform the steps or portions of steps described above for requesting or sending any such menu or formatting instructions.

[0091] Furthermore, the above process steps can be implemented for a system in which a password is required to access copier 11 via the Internet. In this event, one or more of the requests from workstation 1 to copier 11 additionally includes such a password, and the copier's evaluation of the requests in step S1802 and S1810 additionally include the substep of evaluating the password provided to determine whether it is valid.

[0092] Alternatively, or in addition to the preceding paragraph, in a password system an additional step could be included when any packet is sent from workstation 1 to copier 11. In this additional step, the validity of the password is evaluated in router 7 in order to screen whether the IP-packet should even be passed along to LAN 15.

[Automatic Service Requests Over the World Wide Web]

[0093] Figure 19 depicts a service request page automatically generated by a network copier in response to a detected condition. The page includes information

17

EP 0 843 230 B1

18

201 concerning the nature of the problem and user information. In addition, the page includes a link 202 to other pages containing additional information that can be retrieved from the network copier.

[0094] Figure 20 is a flowchart illustrating a method by which network copier 11 sends an automatic service request to a service organization operating workstation 1.

[0095] Generally, according to Figure 20, a condition of the network peripheral device is detected. Then, in response to the detected condition, status information is automatically obtained, the status information corresponding to the detected condition. Finally, upon obtaining the status information, an IP-packet is automatically transmitted to the remote service organization via the IP-network, the IP-packet containing the status information.

[0096] More particularly, in step S2001, network copier 11 detects a condition for which service is required. In this context, service might include, for example, technical service and maintenance or service from a sales organization, such as delivery of new part. The condition might consist of an operational problem, such as a motor failure, discovered during self-diagnostic testing or during normal operations. Alternatively, the condition might consist of an event triggered by exceeding a threshold quantity of usage, such as exceeding a threshold number of pages printed without performing scheduled maintenance. Finally, the condition might be triggered by a particular user input, such as pressing a button instructing copier 11 to place a purchase order request.

[0097] In step S2002, in response to the detected condition information specifically relating to the detected condition together with copier configuration and/or status information is output from copier 11 to NEB 14 via XP interface 51. Although in this embodiment the information relating to the detected condition is generated solely within copier 11, it will of course be understood other techniques might instead be employed in which NEB 14 plays an active role in querying copier 11 for such information.

[0098] In step S2003, NIB 14 receives the information from copier 11 and retrieves from EPROM 34 information regarding the user and a contact person for the user.

[0099] In step S2004, NIB 14 inserts the obtained information into an HTML file selected from HTTP files 65, which also includes a link back to copier 11. Then, NIB 14 creates and sends an IP-packet including the HTML file and with the destination field designating the service organization. The IP-packet is transmitted to workstation 1 successively via LAN 15, router 7, World Wide Web 8 and router 2, as described above in more detail.

[0100] In step S2006, the IP-packet is received by workstation 1. A browser executing on workstation 1 displays the page according to the received instructions. Figure 19 illustrates the received Web page. As shown, the page includes relevant information 201 concerning the user and the detected condition. In addition, by click-

ing on link 202 using mouse 76, the service organization can automatically obtain additional pages from the network copier.

[0101] In step S2007, NIB 14 prepares and sends an e-mail message to workstation 9 in order to advise the network administrator that a service request has been submitted.

[0102] Although the process steps described above transmit an HTML file, various data formats can be used to transmit the relevant data from the network peripheral to the service organization via the IP-network. Examples include transmitting only the field data in CGI format and transmitting the information by e-mail.

[0103] The present invention has been described with respect to particular illustrative embodiments. However, it is to be understood that the invention is not limited to the above described embodiments and that various changes and modifications may be made by those of ordinary skill in the art without departing from the scope of the invention as defined by the appended claims.

#### Claims

1. A method for controlling a peripheral (11) from a remote apparatus (1) over a network (6, 15) characterized in that the peripheral (11) has a server (64) and a connection to the network (6, 15), and the remote apparatus (1) has a web browser (109) and a connection (84) to the network (6, 15), and the method performed at the remote apparatus comprises the steps of:

sending packet data from the remote apparatus (1) over the network (6, 15) to the peripheral (11) including a request to provide function information showing one or a plurality of functions for service or maintenance of the peripheral (11);

receiving at the remote apparatus (1) packet data from the peripheral (11) over the network (6, 15), the packet data including data presenting the function information from the server (64) to the browser (109);

causing the browser to display function information at the remote apparatus in accordance with the received data (S1427); and

in response to user selection from the displayed function information, sending packet data from the remote apparatus (1) over the network (6, 15) to the peripheral (11) (S1435), the packet data including a request to perform the selected function of the peripheral (11), wherein the selected function is performed at the peripheral (11).

2. A method according to claim 1, wherein the received data causes the browser (109) to send a re-

10

19

EP 0 843 230 B1

20

quest to the server (64) for code (S1529) to be executed by the remote apparatus (1) for service or maintenance of the peripheral (11) (S1809).

3. A method according to any one of the preceding claims, wherein one or the plurality of functions for service or maintenance of the peripheral comprise a diagnostic function, a reboot function, a wire cleaning, or a firmware upgrade.

4. A method according to any one of the preceding claims, wherein, if the selected function is a diagnostic function, the diagnostic function is performed at the peripheral (11) and the browser causes the result that is received from the server, of the diagnostic performed by the peripheral (11) to be displayed.

5. A method for obtaining instruction on a peripheral (11) from a remote apparatus (1) over a network, characterized in that the peripheral (11) has a server (64) and a connection to the network (8, 15), and the remote apparatus (1) has a web browser (109) and a connection (84) to the network (8, 15), and that the method performed at the peripheral comprises the steps of:

receiving at the peripheral (11) packet data from the remote apparatus (1) over the network, the packet data including a request to provide function information showing one or a plurality of functions for service or maintenance of the peripheral;

sending packet data from the peripheral (11) over the network (8, 15) to the remote application (1), the packet data including data presenting the function information from the server (64) to the browser (109) to enable the browser to display the function information at the remote apparatus in accordance with the data (S1527); receiving at the peripheral (11) packet data from the remote apparatus (1) over the network, the packet data including a request to execute the function selected from the function information (S1802); and

in response to the second request to execute the selected function, executing the selection function at the peripheral (S1810).

6. A method according to claim 5, wherein the data presenting the function information is a file which causes the browser (109) to send a request to the server (64) for code to be executed by the remote apparatus (1) for service or maintenance of the peripheral (11).

7. A method according to any one of the preceding claims, wherein the peripheral comprises a copier

(11) or a printer (10).

8. A method according to any one of the preceding claims, wherein one or the plurality of functions for service or maintenance of the peripheral comprise a diagnostic function, a reboot function, a wire cleaning or a firmware upgrade.

9. A method according to any one of the preceding claims, wherein said network is the Internet, and wherein each of said steps of sending and receiving includes sending and/or receiving over the network (8, 15) using a HTTP protocol.

10. A method according to any one of the preceding claims, wherein, in response to the second request to execute a diagnostic function, the peripheral executes a diagnostic and the result of the diagnostic executed by the peripheral is sent over the network to the browser.

11. A method according to any one of the preceding claims, wherein, when the selected function is to reboot the peripheral, the peripheral reboots (S1321).

12. An apparatus for obtaining instruction for a peripheral (11) from a remote apparatus (1) over a network (8, 15), the apparatus being characterized in having a server (64) and a connection to the network (8, 15), the remote apparatus (1) having a web browser and a connection (84) to the network (8, 15), the apparatus for obtaining instruction further comprising:

receiving means for receiving packet data over the network (8, 15), the packet data including a request to provide function information showing one or a plurality of functions for service or maintenance of the peripheral (11);

sending means for sending packet data over the network, the packet data including data presenting function information from the server (64) to the browser (109) to enable the browser to display the function information at the remote apparatus in accordance with the data presenting function information;

receiving means for receiving packet data over the network (8, 15), the packet data including a second request to execute a function selected from the function information; and

controlling means for, in response to the second request, controlling the peripheral to execute the selected function.

13. An apparatus according to claim 12, wherein the apparatus comprises a network interface board (14).

14. An apparatus according to either one of claims 12

11

21

EP 0 843 230 B1

22

and 13, wherein said network (6, 15) comprises the Internet, and wherein each of said sending means and said receiving means is arranged to send and/or receive over the network (6, 15) using a HTTP protocol.

15. An apparatus according to any one of claims 12 to 14, wherein the peripheral comprises a copier (11) or a printer (10).

16. An apparatus according to any one of claims 12 to 15, wherein, in response to the second request to execute a diagnostic function, said controlling means controls the peripheral to execute a diagnosis and sends the result of the diagnosis executed by the peripheral (11) over the network to the browser (109).

17. An apparatus according to any one of claims 12 to 18, wherein the selected function is to reboot the peripheral (11), said controlling means reboots the peripheral (11).

18. An apparatus according to any one of claims 12 to 17, wherein the peripheral (11) includes the apparatus for obtaining instruction.

19. An apparatus according to any one of claims 12 to 18, wherein one or the plurality of functions for service or maintenance of the peripheral comprises a diagnostic function, a reboot function, a wire cleaning or a firmware upgrade.

20. A computer program including processor implementable instructions for performing all the steps of a method according to any one of claims 1 to 11.

21. A computer software product storing a computer program according to claim 20.

#### Patentansprüche

1. Verfahren zum Steuern eines Peripheriegeräts (11) durch eine entfernte Vorrichtung (1) über ein Netzwerk (6, 15), dadurch gekennzeichnet, daß das Peripheriegerät (11) einen Server (84) und eine Verbindung zu dem Netzwerk (6, 15) aufweist und die entfernte Vorrichtung (1) einen Webbrowser (109) und eine Verbindung zu dem Netzwerk (6, 15) aufweist, und das an der entfernten Vorrichtung durchgeführte Verfahren die Schritte umfaßt:

Senden von Paketdaten von der entfernten Vorrichtung (1) über das Netzwerk (6, 15) an das Peripheriegerät (11) einschließlich einer Anweisung zum Bereitstellen von Funktionsinformationen, die eine oder eine Vielzahl von

Funktionen zur Bedienung oder Wartung des Peripheriegeräts (11) zeigen;

Empfangen von Paketdaten von dem Peripheriegerät (11) über das Netzwerk (6, 15) an der entfernten Vorrichtung (1), wobei die Paketdaten Daten beinhalten, die die Funktionsinformationen von dem Server (84) für den Browser (109) darstellen;

Veranlassen des Browsers, Funktionsinformationen an der entfernten Vorrichtung in Übereinstimmung mit den empfangenen Daten anzuzeigen (S1427); und

Senden, in Antwort auf eine Benutzerauswahl aus den angezeigten Funktionsinformationen, von Paketdaten von der entfernten Vorrichtung (1) über das Netzwerk (6, 15) an das Peripheriegerät (11) (S1435), wobei die Paketdaten eine Aufforderung zum Durchführen der ausgewählten Funktion des Peripheriegeräts (11) beinhalten, und wobei die ausgewählte Funktion an dem Peripheriegerät (11) durchgeführt wird.

2. Verfahren nach Anspruch 1, bei dem die empfangenen Daten den Browser (109) veranlassen, eine Aufforderung an den Server (84) zu senden (S1529), Code zu übertragen, der durch die entfernte Vorrichtung (1) für Dienste für das oder eine Wartung des Peripheriegeräts (11) auszuführen ist (S1809).

3. Verfahren nach einem der vorangehenden Ansprüche, bei dem eine der oder die Vielzahl von Funktionen für Dienste für das oder die Wartung des Peripheriegeräts (11) eine Diagnosefunktion, eine Reboot-Funktion, eine Verdrahtungsreinigung oder ein Firmware-Upgrade umfassen.

4. Verfahren nach einem der vorangehenden Ansprüche, bei dem dann, wenn die ausgewählte Funktion eine Diagnosefunktion ist, die Diagnosefunktion an dem Peripheriegerät (11) durchgeführt wird und der Browser veranlaßt, daß das Ergebnis der durch das Peripheriegerät (11) durchgeführten Diagnose, das von dem Server empfangen wird, angezeigt wird.

5. Verfahren zum Erhalten einer Anweisung für ein Peripheriegerät (11) von einer entfernten Vorrichtung (1) über ein Netzwerk, dadurch gekennzeichnet, daß das Peripheriegerät (11) einen Server und eine Verbindung mit dem Netzwerk (6, 15) aufweist, und die entfernte Vorrichtung (1) einen Webbrowser (109) und eine Verbindung (84) zu dem Netzwerk (6, 15) aufweist, und daß das an dem Peripheriegerät durchgeführte Verfahren die Schritte umfaßt:

Empfangen, an dem Peripheriegerät (11), von Paketdaten von der entfernten Vorrichtung (1) über das Netzwerk, wobei die Paketdaten eine

12

23

EP 0 843 230 B1

24

- Aufforderung zum Bereitstellen von Funktionsinformationen beinhalten, die eine oder eine Vielzahl von Funktionen für Dienste oder zur Wartung des Peripheriegeräts zeigen; Senden von Paketdaten von dem Peripheriegerät (11) über das Netzwerk (6, 15) an die entfernte Anwendung (1), wobei die Paketdaten die die Funktionsinformationen von dem Server (64) an den Browser (109) darstellenden Daten beinhalten, um es dem Browser zu ermöglichen, die Funktionsinformationen an der entfernten Vorrichtung in Übereinstimmung mit den Daten anzuzeigen (S1527); Empfangen, an dem Peripheriegerät (11), von Paketdaten von der entfernten Vorrichtung (1) über das Netzwerk, wobei die Paketdaten eine Aufforderung beinhalten, die aus den Funktionsinformationen ausgewählte Funktion auszuführen (S1802); und In Antwort auf die zweite Aufforderung, um die ausgewählte Funktion auszuführen, Ausführen der ausgewählten Funktion an dem Peripheriegerät (S1810).
6. Verfahren nach Anspruch 5, bei dem die die Funktionsinformationen darstellenden Daten eine Datei sind, welche den Browser (109) veranlaßt, eine Aufforderung an den Server (64) nach Code zu senden, der durch die entfernte Vorrichtung (1) zur Dienstleistung für das oder eine Wartung des Peripheriegerät(s) auszuführen ist.
7. Verfahren nach einem der vorangehenden Ansprüche, bei dem das Peripheriegerät ein Kopiergerät (11) oder einen Drucker (10) umfaßt.
8. Verfahren nach einem der vorangehenden Ansprüche, bei dem eine oder die Vielzahl von Funktionen für Dienste für das oder eine Wartung des Peripheriegerät(s) eine Diagnosefunktion, eine Reboot-Funktion oder eine Verdrahtungsreinigungsfunktion, oder ein Firmware-Upgrade umfaßt.
9. Verfahren nach einem der vorangehenden Ansprüche, bei dem das Netzwerk das Internet ist, und bei dem jeder der Schritte des Sendens und Empfangens ein Senden und/oder Empfangen über das Netzwerk (6, 15) unter Verwendung eines HTTP-Protokolls beinhaltet.
10. Verfahren nach einem der vorangehenden Ansprüche, bei dem in Antwort auf die zweite Aufforderung zum Ausführen einer Diagnosefunktion das Peripheriegerät eine Diagnose ausführt und das Ergebnis der durch das Peripheriegerät ausgeführten Diagnose über das Netzwerk an den Browser gesendet wird.
11. Verfahren nach einem der vorangehenden Ansprüche, bei dem dann, wenn die ausgewählte Funktion zum neu Booten des Peripheriegeräts dient, das Peripheriegerät neu bootet (S1321).
12. Vorrichtung zum Erhalten einer Anweisung für ein Peripheriegerät (11) von einer entfernten Vorrichtung (1) über ein Netzwerk (6, 15), wobei die Vorrichtung dadurch gekennzeichnet ist, daß sie einem Server (64) und eine Verbindung zu dem Netzwerk (6, 15) aufweist, und die entfernte Vorrichtung (1) einen Webbrowser und eine Verbindung (84) zu dem Netzwerk (6, 15) aufweist, und wobei die Vorrichtung zum Erhalten einer Anweisung weiter umfaßt:
- eine Empfangseinrichtung zum Empfangen von Paketdaten über das Netzwerk (6, 15), wobei die Paketdaten eine Aufforderung zum Bereitstellen von Funktionsinformationen beinhalten, die eine oder eine Vielzahl von Funktionen für Dienste oder eine Wartung des Peripheriegeräts zeigen; eine Sendeeinrichtung zum Senden von Paketdaten über das Netzwerk, wobei die Paketdaten Daten beinhalten, die Funktionsinformationen von dem Server (64) zu dem Browser (109) beinhalten, um es dem Browser zu ermöglichen, die Funktionsinformationen an der entfernten Vorrichtung in Übereinstimmung mit den Funktionsinformationen darstellenden Daten anzuzeigen; eine Empfangseinrichtung zum Empfangen von Paketdaten über das Netzwerk (6, 15), wobei die Paketdaten eine zweite Aufforderung zum Ausführen einer aus den Funktionsinformationen ausgewählten Funktion beinhalten; und eine Steuereinrichtung zum, in Antwort auf die zweite Aufforderung, Steuern des Peripheriegeräts so, daß die ausgewählte Funktion ausgeführt wird.
13. Vorrichtung nach Anspruch 12, bei der die Vorrichtung eine Netzwerkschnittstellenkarte (14) umfaßt.
14. Vorrichtung nach einem der Ansprüche 12 oder 13, bei der das Netzwerk (6, 15) das Internet umfaßt, und bei der die Sendeeinrichtung und die Empfangseinrichtung dazu angeordnet sind, über das Netzwerk (6, 15) unter Verwendung eines http-Protokolls zu senden und/oder zu empfangen.
15. Vorrichtung nach einem der Ansprüche 12 bis 14, bei der das Peripheriegerät ein Kopiergerät (13) oder einen Drucker (10) umfaßt.
16. Vorrichtung nach einem der Ansprüche 12 bis 15,

25

EP 0 843 230 B1

26

bei der in Antwort auf die zweite Aufforderung zum Ausführen einer Diagnosefunktion die Steuereinrichtung das Peripheriegerät so steuert, daß es eine Diagnose ausführt und das Ergebnis der durch das Peripheriegerät (11) ausgeführten Diagnose über das Netzwerk an den Browser (109) sendet.

17. Vorrichtung nach einem der Ansprüche 12 bis 16, bei der die ausgewählte Funktion dazu dient, das Peripheriegerät (11) neu zu booten, und die Steuereinrichtung das Peripheriegerät neu bootet.

18. Vorrichtung nach einem der Ansprüche 12 bis 17, bei der das Peripheriegerät (11) die Vorrichtung zum Erhalten von Anweisungen beinhaltet.

19. Vorrichtung nach einem der Ansprüche 12 bis 18, bei der eine oder die Vielzahl von Funktionen für Dienste oder eine Wartung des Peripheriegeräts eine Diagnosefunktion, eine Reboot-Funktion, eine Verdichtungsreinigung oder ein Firmware-Upgrade umfaßt.

20. Computerprogramm mit in einen Prozessor implementierbaren Anweisungen zum Durchführen aller Schritte eines Verfahrens nach einem der Ansprüche 1 bis 11.

21. Computer-Softwareprodukt, das ein Computerprogramm nach Anspruch 20 speichert.

#### Revendications

1. Procédé de commande d'un périphérique (11) depuis un appareil distant (1) via un réseau (6, 15), caractérisé en ce que le périphérique (11) possède un serveur (64) et une connexion au réseau (6, 15), en ce que l'appareil distant (1) possède un navigateur web (109) et une connexion (84) au réseau (6, 15) et en ce que le procédé mis en oeuvre à l'appareil distant comprend les étapes consistant à :

envoyer des données en paquets depuis l'appareil distant (1), via le réseau (6, 15), vers le périphérique (11), comprenant une requête d'information sur les fonctions, présentant une ou une pluralité de fonctions de service ou de maintenance du périphérique (11) ;  
recevoir sur l'appareil distant (1) des données en paquets provenant du périphérique (11), via le réseau (6, 15), les données en paquets comprenant des données présentant les informations de fonction du serveur (64) vers le navigateur (109) ;  
faire afficher par le navigateur les informations de fonction sur l'appareil distant, selon les données reçues (S1427) ; et

en réponse à une sélection par l'utilisateur parmi les informations affichées sur les fonctions, envoyer des données en paquets depuis l'appareil distant (1), via le réseau (6, 15), vers le périphérique (11) (S1435), les données en paquets comprenant une demande d'exécution de la fonction sélectionnée du périphérique (11), la fonction sélectionnée étant exécutée au niveau du périphérique (11).

2. Procédé selon la revendication 1, dans lequel les données reçues font que le navigateur (109) envoie au serveur (64) une demande de code (S1529) devant être exécuté par l'appareil distant (1) pour le service ou la maintenance du périphérique (11) (S1809).

3. Procédé selon l'une quelconque des revendications précédentes, dans lequel une ou la pluralité de fonctions de service ou de maintenance du périphérique comprend une fonction de diagnostic, une fonction de réamorçage, de nettoyage de fil ou une mise à jour de microprogramme.

4. Procédé selon l'une quelconque des revendications précédentes, dans lequel, si la fonction sélectionnée est une fonction de diagnostic, la fonction de diagnostic est exécutée au périphérique (11) et le navigateur fait afficher le résultat du diagnostic exécuté au niveau du périphérique (11), qu'il a reçu du serveur.

5. Procédé d'obtention d'instructions sur un périphérique (11), à partir d'un appareil distant (1) via un réseau, caractérisé en ce que le périphérique (11) possède un serveur (64) et une connexion au réseau (6, 15), en ce que l'appareil distant (1) possède un navigateur web (109) et une connexion (84) au réseau (6, 15) et en ce que le procédé mis en oeuvre sur le périphérique comprend les étapes consistant à :

recevoir sur le périphérique (11) des données en paquets de l'appareil distant (1), via le réseau, les données en paquets comprenant une requête d'information sur les fonctions, montrant une ou une pluralité de fonctions de service ou de maintenance du périphérique ;  
envoyer des données en paquets depuis le périphérique (11), via le réseau (6, 15), vers l'application distante (1), les données en paquets comprenant des données présentant les informations de fonctions du serveur (64) au navigateur (109), afin de permettre au navigateur d'afficher les informations de fonctions à l'appareil distant, selon les données reçues (S1527) ;  
recevoir au niveau du périphérique (11) des

27

EP 0 843 230 B1

28

données en paquets provenant de l'appareil distant (1), via le réseau, les données en paquets comprenant une demande d'exécution de la fonction sélectionnée parmi les informations sur les fonctions (S1802); et en réponse à la deuxième demande d'exécution de la fonction sélectionnée, exécuter la fonction sélectionnée au niveau du périphérique (S1810).

6. Procédé selon la revendication 5, dans lequel les données présentant les informations sur les fonctions sont un fichier qui amène le navigateur (109) à envoyer au serveur (84) une demande de code devant être exécuté par l'appareil distant (1) pour le service ou la maintenance du périphérique (11).

7. Procédé selon l'une quelconque des revendications précédentes, dans lequel le périphérique comprend un copieur (11) ou une imprimante (10).

8. Procédé selon l'une quelconque des revendications précédentes, dans lequel une ou la pluralité de fonctions de service ou de maintenance du périphérique comprend une fonction de diagnostic, une fonction de réamorçage, un nettoyage de fil ou une mise à jour de microprogramme.

9. Procédé selon l'une quelconque des revendications précédentes, dans lequel ledit réseau est l'internet, et dans lequel chacune desdites étapes d'émission et de réception comprend l'émission et/ou la réception, via le réseau (6, 15), en utilisant un protocole HTTP.

10. Procédé selon l'une quelconque des revendications précédentes, dans lequel, en réponse à la deuxième demande d'exécution d'une fonction de diagnostic, le périphérique exécute un diagnostic et le résultat du diagnostic exécuté au niveau du périphérique est envoyé au navigateur via le réseau.

11. Procédé selon l'une quelconque des revendications précédentes, dans lequel, lorsque la fonction sélectionnée est le redémarrage du périphérique, le périphérique redémarre (S1321).

12. Appareil d'obtention d'instructions d'un appareil distant (1), via un réseau (6, 15), pour un périphérique (11), l'appareil étant caractérisé en ce qu'il possède un serveur (84) et une connexion au réseau (6, 15), l'appareil distant (1) ayant un navigateur web et une connexion (84) au réseau (6, 15), l'appareil d'obtention d'instructions comprenant en outre :

un moyen de réception destiné à recevoir des données en paquets sur le réseau (6, 15), les données en paquets comprenant une requête

d'information sur les fonctions, montrant une ou une pluralité de fonctions de service ou de maintenance du périphérique (11);

un moyen d'émission destiné à émettre des données en paquets sur le réseau, les données en paquets comprenant des données présentant au navigateur (109) des informations de fonctions du serveur (84), afin de permettre au navigateur d'afficher les informations de fonctions sur l'appareil distant, conformément aux données présentant des informations de fonction;

un moyen de réception de données en paquets via le réseau (6, 15), les données en paquets comprenant une deuxième demande d'exécuter une fonction sélectionnée parmi les informations de fonctions; et

un moyen de commande destiné, en réponse à la deuxième demande, à commander au périphérique d'exécuter la fonction sélectionnée.

13. Appareil selon la revendication 12, dans lequel l'appareil comprend une carte d'interface réseau (14).

14. Appareil selon l'une quelconque des revendications 12 et 13, dans lequel ledit réseau (6, 15) comprend l'internet, et dans lequel chacun desdits moyens d'émission et desdits moyens de réception est conçu pour émettre et/ou recevoir sur le réseau (6, 15) en utilisant un protocole HTTP.

15. Appareil selon l'une quelconque des revendications 12 à 14, dans lequel le périphérique comprend un copieur (11) ou une imprimante (10).

16. Appareil selon l'une quelconque des revendications 12 à 15, dans lequel, en réponse à la deuxième demande d'exécution d'une fonction de diagnostic, ledit moyen de commande commande au périphérique d'exécuter un diagnostic et envoie le résultat du diagnostic exécuté au niveau du périphérique (11) au navigateur (109) via le réseau.

17. Appareil selon l'une quelconque des revendications 12 à 16, dans lequel, lorsque la fonction sélectionnée est le réamorçage du périphérique (11), ledit moyen de commande réamorce le périphérique (11).

18. Appareil selon l'une quelconque des revendications 12 à 17, dans lequel le périphérique (11) inclut l'appareil d'obtention d'instructions.

19. Appareil selon l'une quelconque des revendications 12 à 18, dans lequel une ou la pluralité de fonctions de service ou de maintenance du périphérique comprend une fonction de diagnostic, une fonction de réamorçage, de nettoyage de fil ou de mise à jour

15

29

EP 0 843 230 B1

30

de microprogramme.

20. Programme d'ordinateur comprenant des instructions pouvant être mises en oeuvre par un proces-  
seur, destiné à exécuter toutes les étapes d'un procé- 5  
dé selon l'une quelconque des revendications 1  
à 11.

21. Progiciel pour ordinateur stockant un programme  
d'ordinateur selon la revendication 20. 10

15

20

25

30

35

40

45

50

55

16



EP 0 843 230 B1



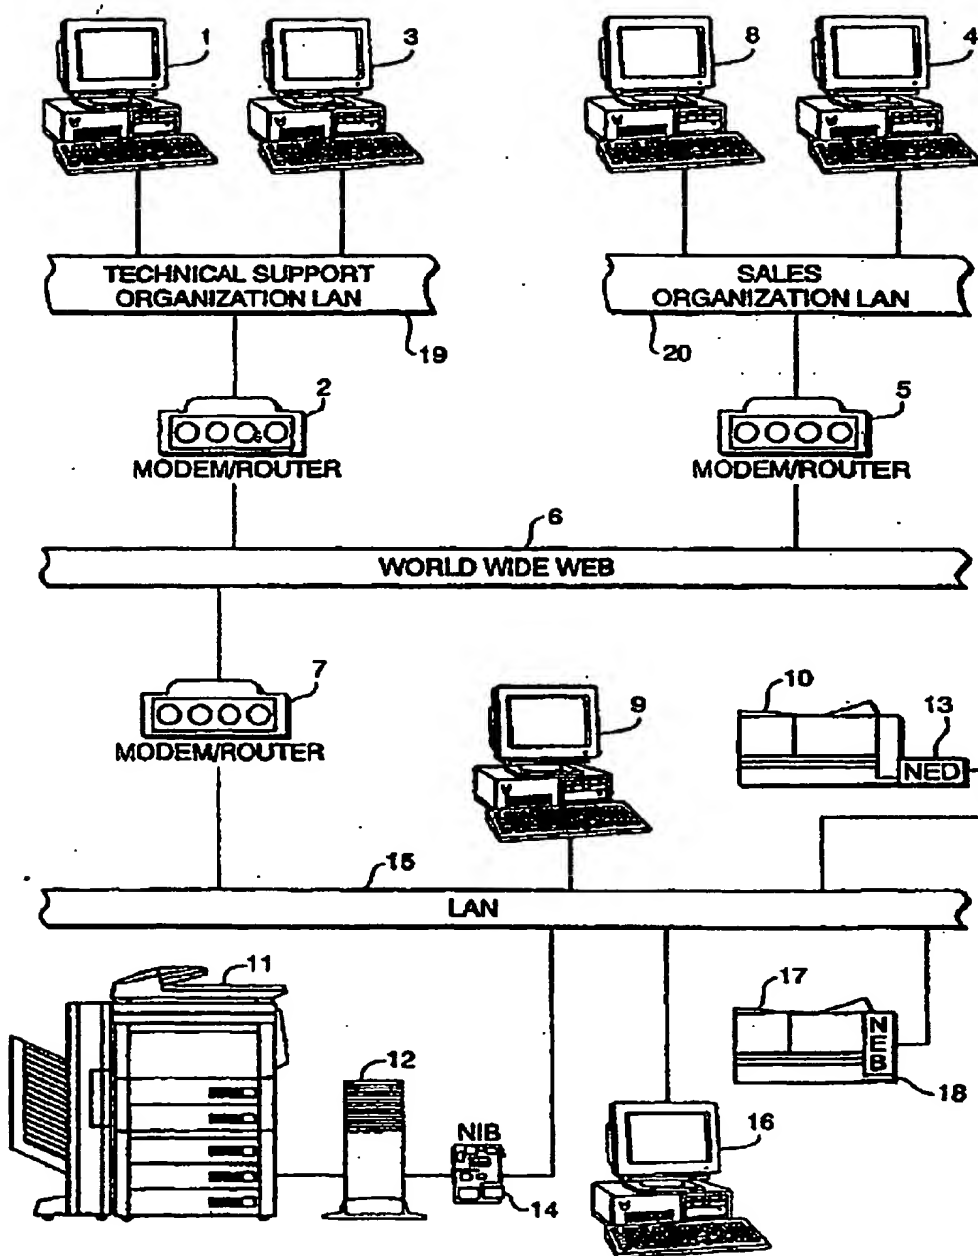


FIG. 1

EP 0 843 230 B1

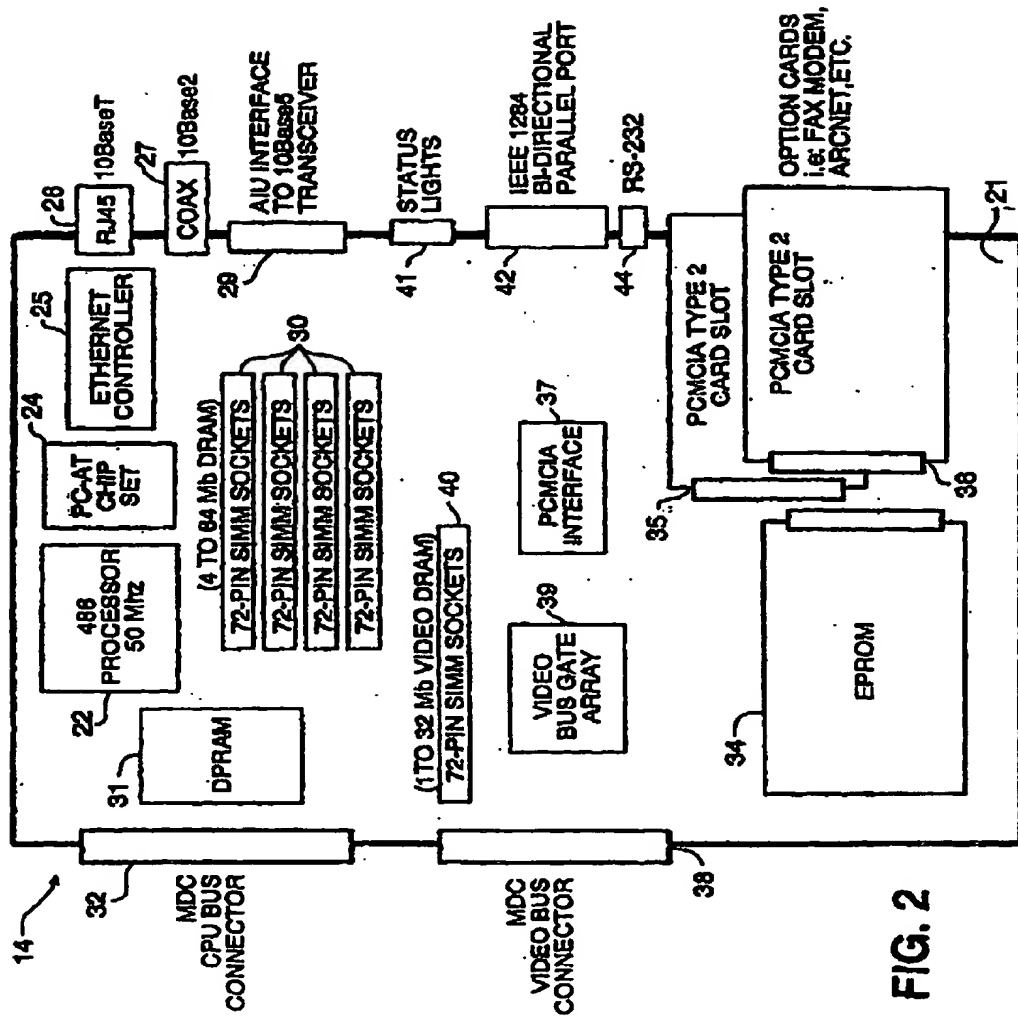

EP 0 843 230 B1

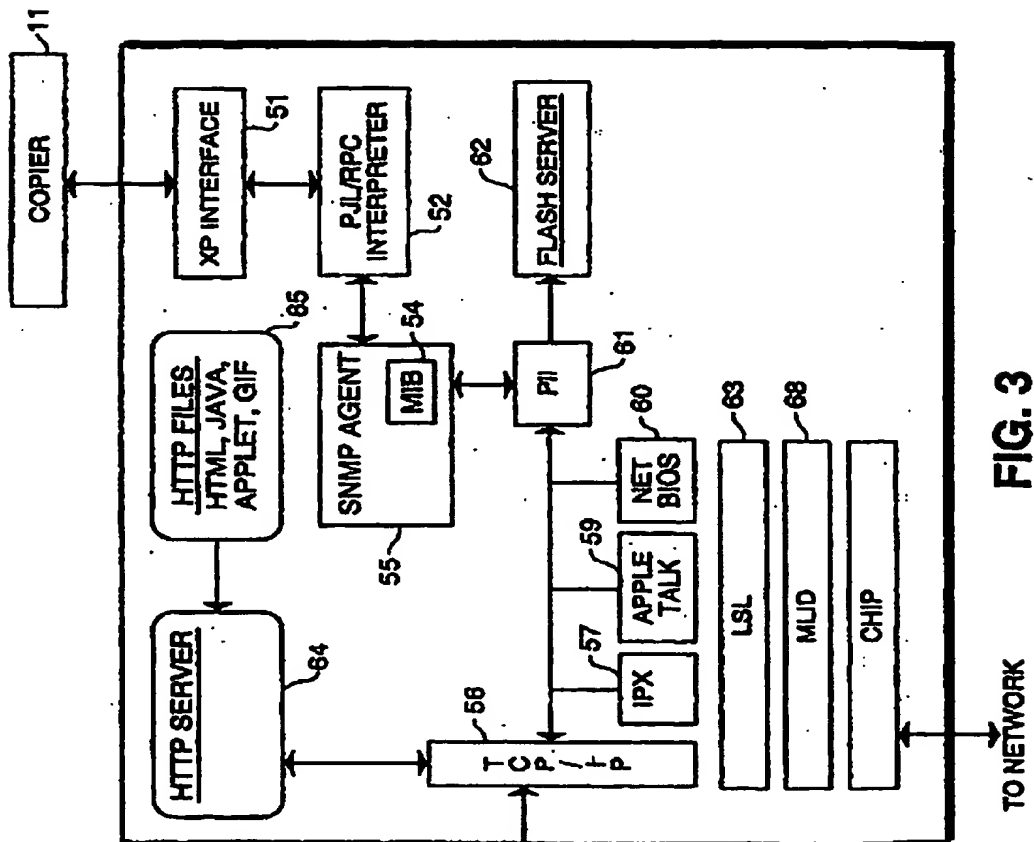

EP 0 843 230 B1

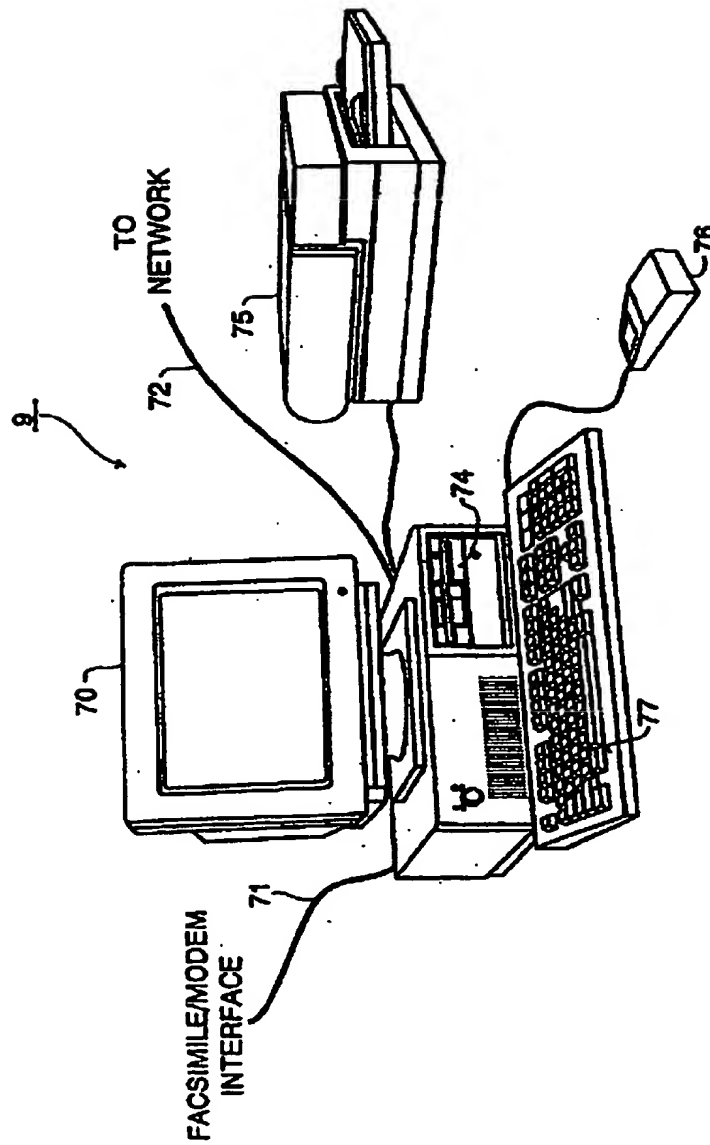


FIG. 4

EP 0 843 230 B1

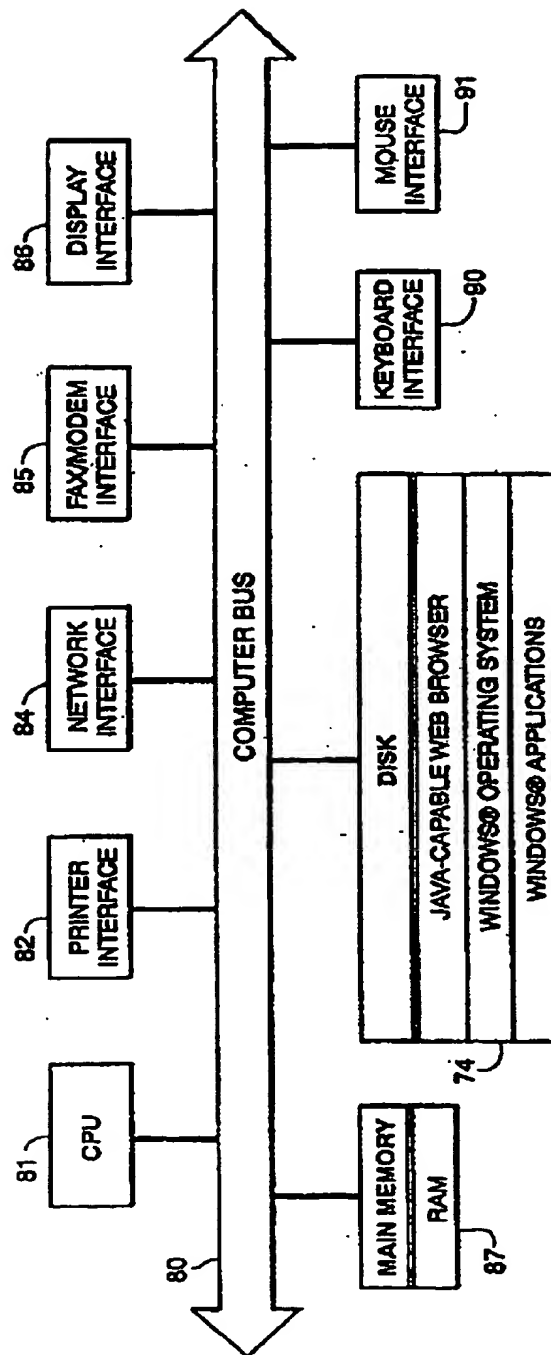
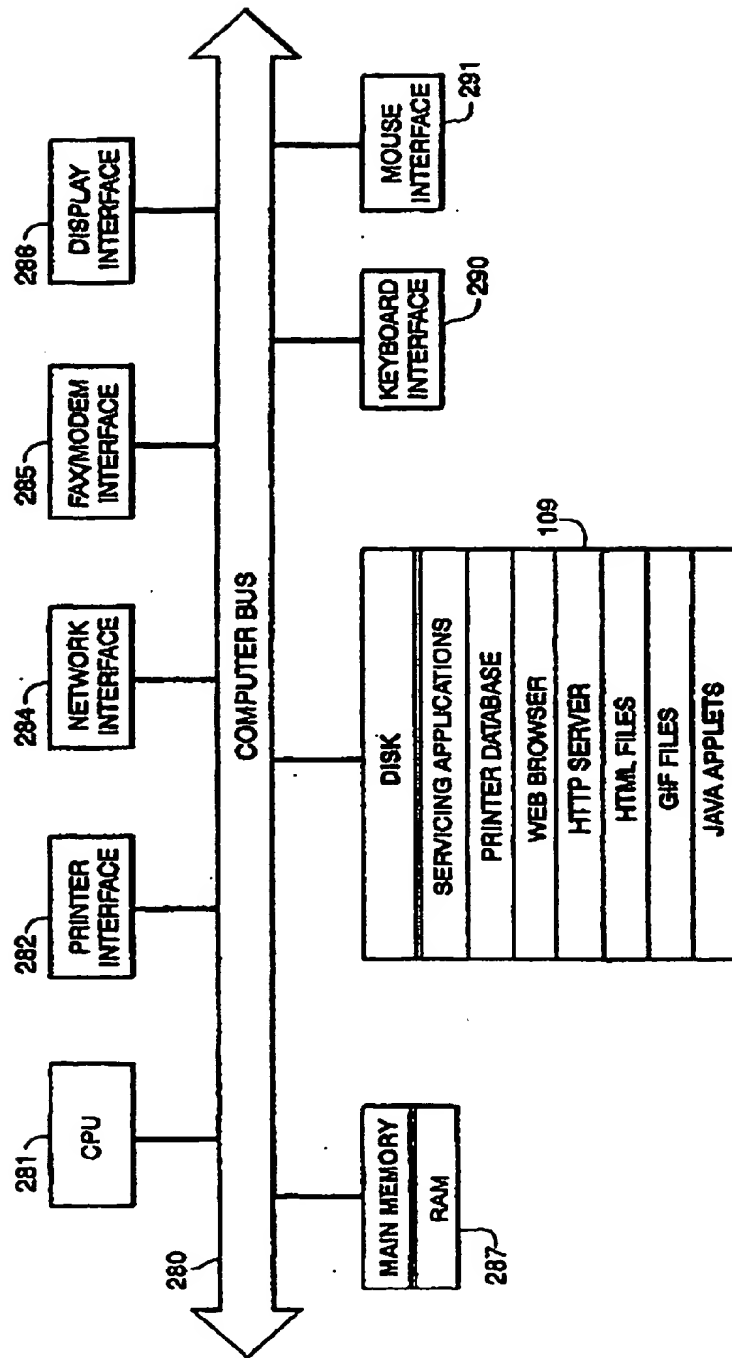


FIG. 5

EP 0 843 230 B1



**FIG. 6**

EP 0 843 230 B1

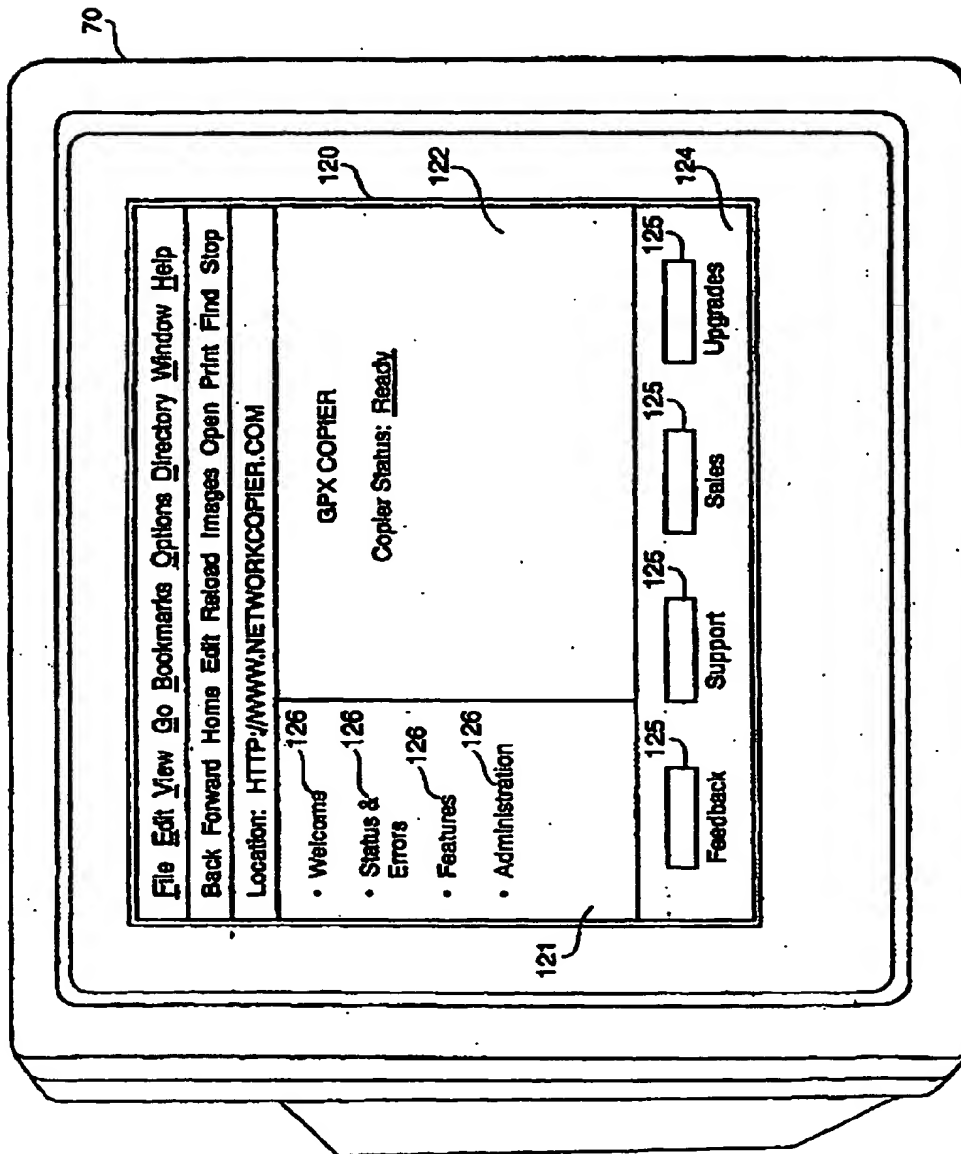


FIG. 7

EP 0 843 230 B1

130

```
<HTML>
<HEAD>
<TITLE>Canon Webspot v1.0 pre-alpha</TITLE>

<FRAMESET ROWS="90%,*">

  <FRAMESET COLS="144,*">
    <FRAME SRC="left.htm" NAME="TabFrame"> 131
    <FRAME SRC="home.html" NAME="MainFrame"> 132
  </FRAMESET>
  <FRAME NAME="FooterFrame"
SRC="http://146.184.22.107/help/footer.htm" 134
MARGINHEIGHT="1" BORDER=0>
</FRAMESET>

<BR>

<META NAME="GENERATOR" CONTENT="Internet Assistant for
Microsoft Word 2.0z">
</HEAD>
<BODY TOPMARGIN=0 BACKGROUND="FOOT_BACK.GIF">
<P>
<BR>

</BODY>
</HTML>
```

FIG. 8



EP 0 843 230 B1

```

<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 3.2//EN">
<HTML>
<HEAD>
  <TITLE>Untitled</TITLE>
  <META NAME="GENERATOR" CONTENT="Mozilla/3.0Gold (Win95; I
[Netscape]">
</HEAD>
<BODY>

<P><A HREF="home.htm" TARGET="MainFrame"><IMG SRC="GRBUL.GIF"
BORDER=0 HEIGHT=12 WIDTH=11></A><B><FONT
COLOR="#000000">Welcome</FONT></B>

<HR></P>

<P><img></P>
141
<P><A HREF="status2.htm" TARGET="MainFrame"><IMG
SRC="GRBUL.GIF" BORDER=0 HEIGHT=12 WIDTH=11></A><B><FONT
COLOR="#000080">Status&
Errors</FONT></B>
<HR></P>
141
<P><A HREF="features.htm" TARGET="MainFrame"><IMG
SRC="GRBUL.GIF" BORDER=0 HEIGHT=12 WIDTH=11></A><B><FONT
COLOR="#800080">Features</FONT></B>

<HR></P>
141
<P><A HREF="admin.htm" TARGET="MainFrame"><IMG
SRC="GRBUL.GIF" BORDER=0 HEIGHT=12 WIDTH=11></A><B><FONT
COLOR="#008080">Administration</FONT></B>

<HR></P>
142
<APPLET CODE="select.class">
</APPLET>

</BODY>
</HTML>

```

FIG. 9

EP 0 843 230 B1

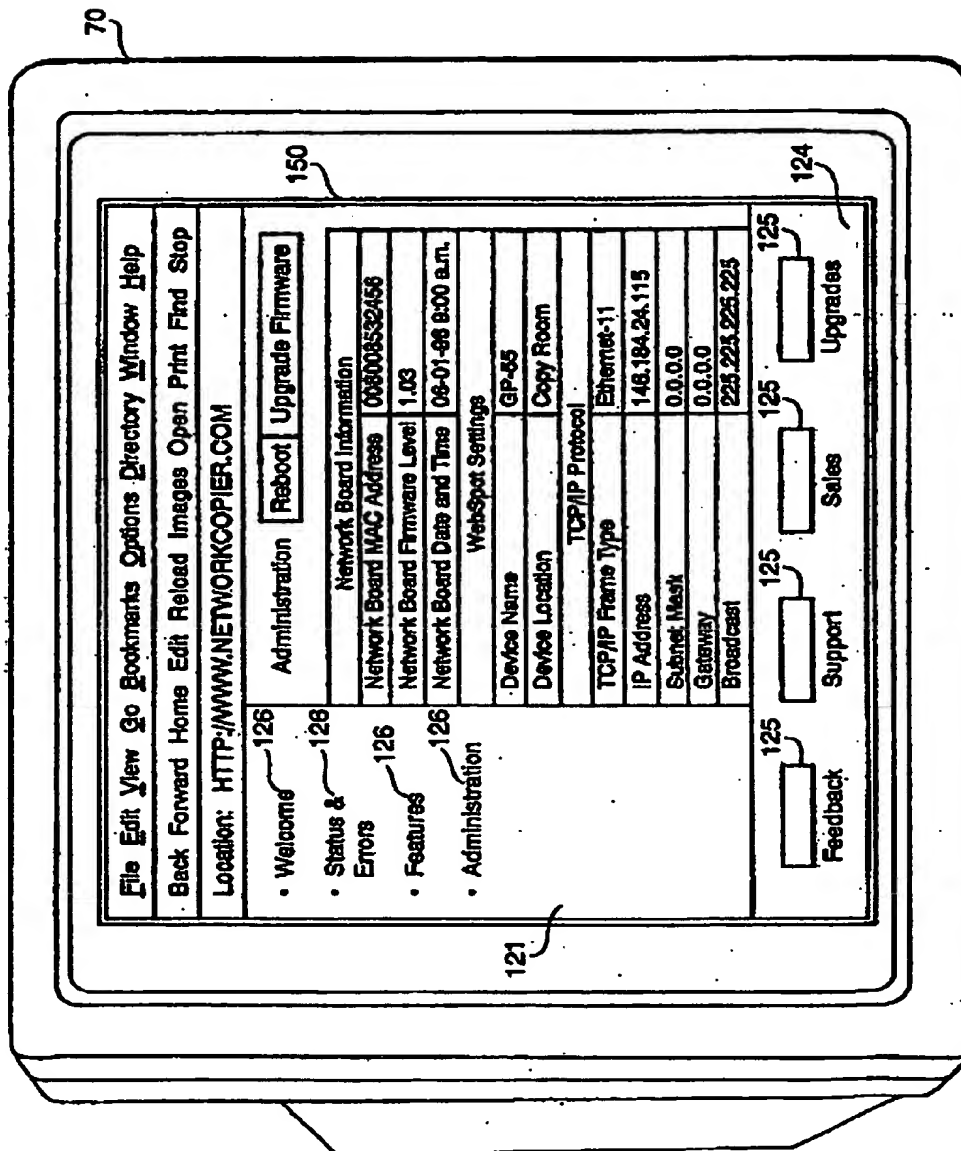


FIG. 10

EP 0 843 230 B1

```

<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 3.2//EN">
<HTML>
<HEAD>
  <TITLE>Untitled</TITLE>
  <META NAME="GENERATOR" CONTENT="Mozilla/3.0Gold (Win95; I
[Netscape]">
</HEAD>
<BODY>

<P><A NAME="admin_currentconfig"></A><FONT SIZE=+2><B><FONT
COLOR="#008080">Administration</FONT></B>
</FONT><IMG
SRC="file:///G:/USERS/MKODIMER/MKODIMER/webspot/proto/reboot_
1.gif" HEIGHT=18 WIDTH=94><A HREF="flash.f1"><IMG
SRC="file:///G:/USERS/MKODIMER/MKODIMER/webspot/proto/flash_1
.gif" BORDER=0 HEIGHT=18 WIDTH=178></A><A
HREF="p_defaults.pd"><IMG
SRC="file:///G:/USERS/MKODIMER/MKODIMER/webspot/proto/printse
tings_1.gif" BORDER=0 HEIGHT=18 WIDTH=174></A></P>
161
  <APPLET CODE="appicons.class" WIDTH=100 HEIGHT=25>
  </APPLET>
165
  <APPLET CODE="bulldtbl.class" WIDTH=600 HEIGHT=1000>
  </APPLET>

</BODY>
</HTML>

```

FIG. 11

EP 0 843 230 B1

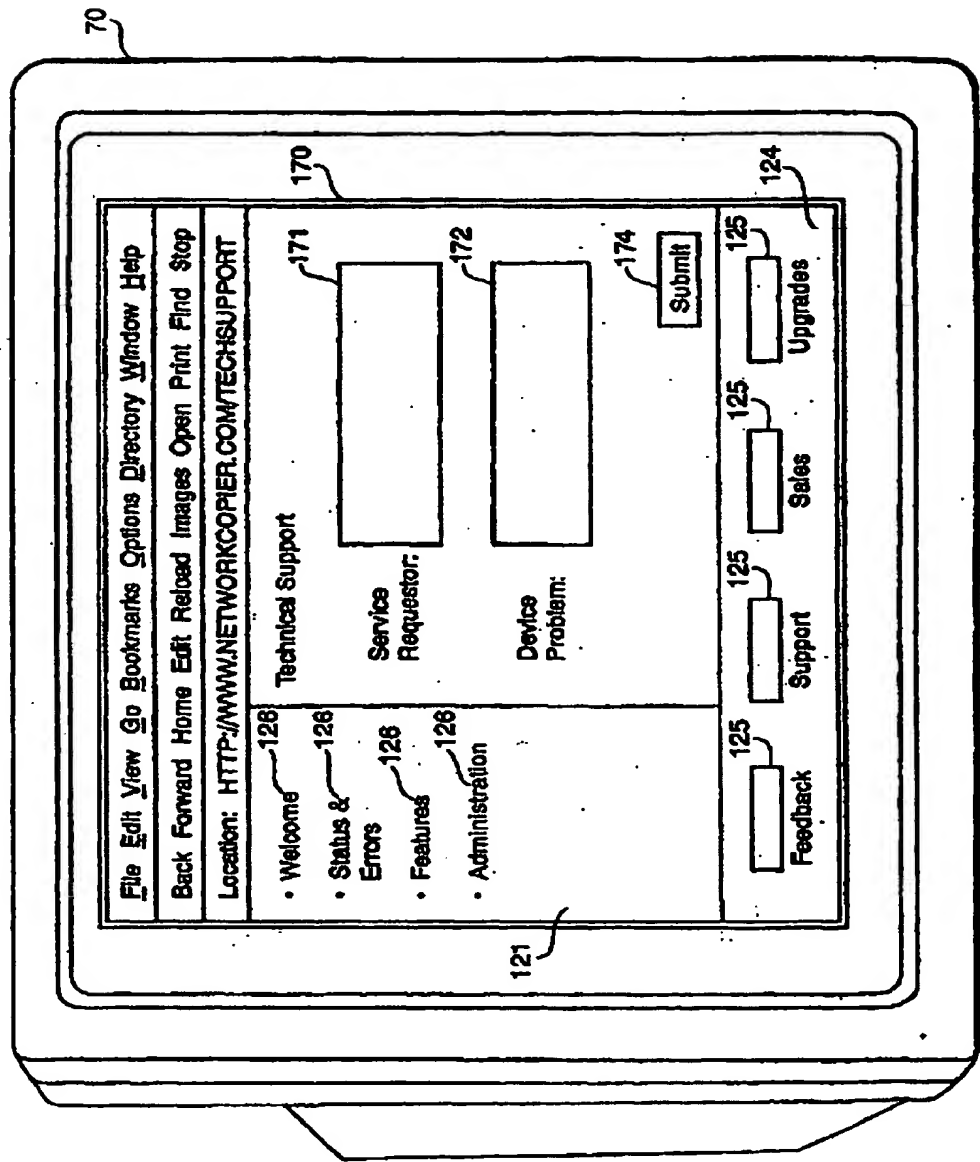


FIG. 12

EP 0 843 230 B1

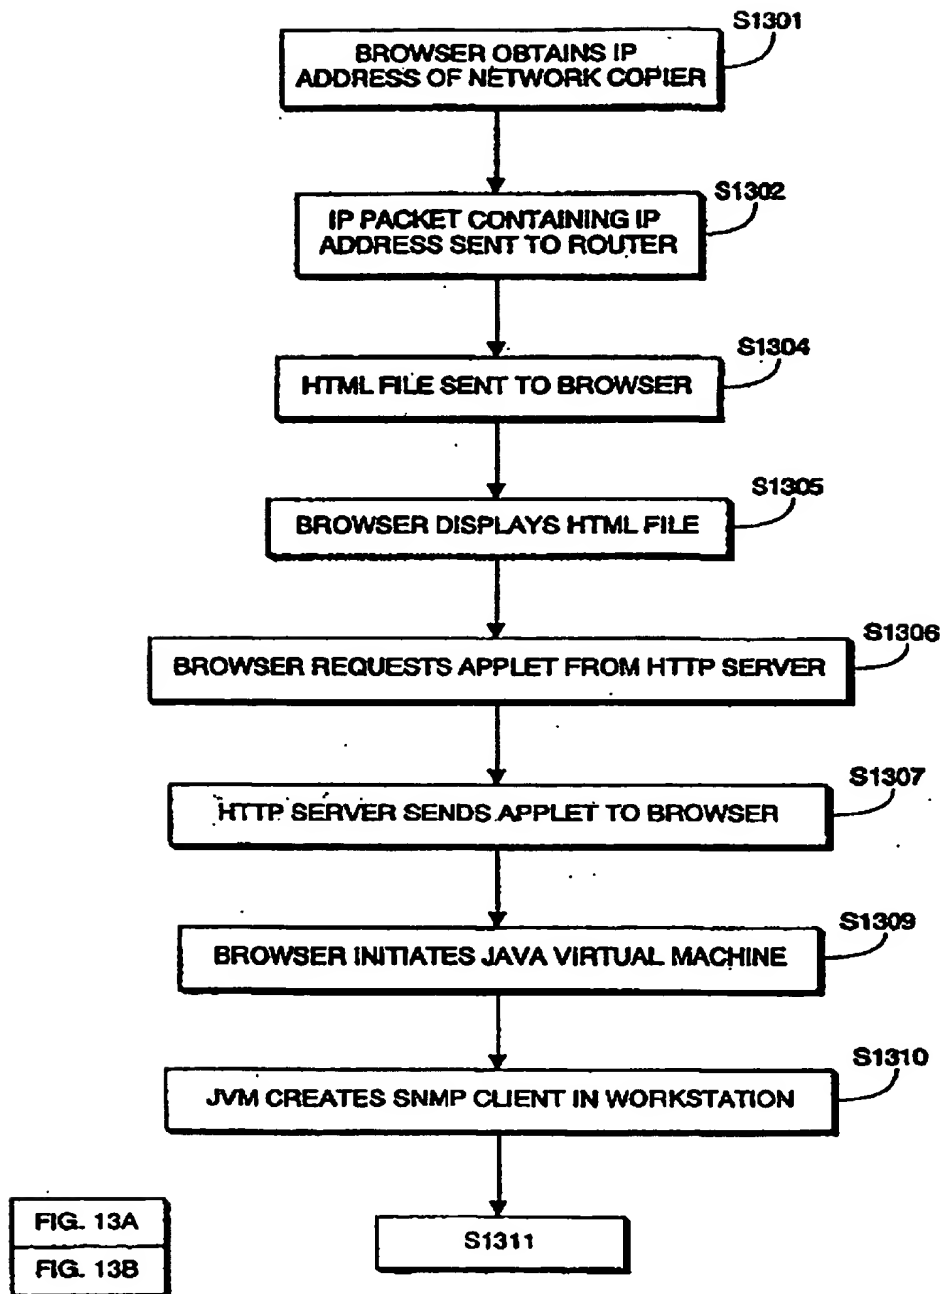


FIG. 13

FIG. 13A

EP 0 843 230 B1

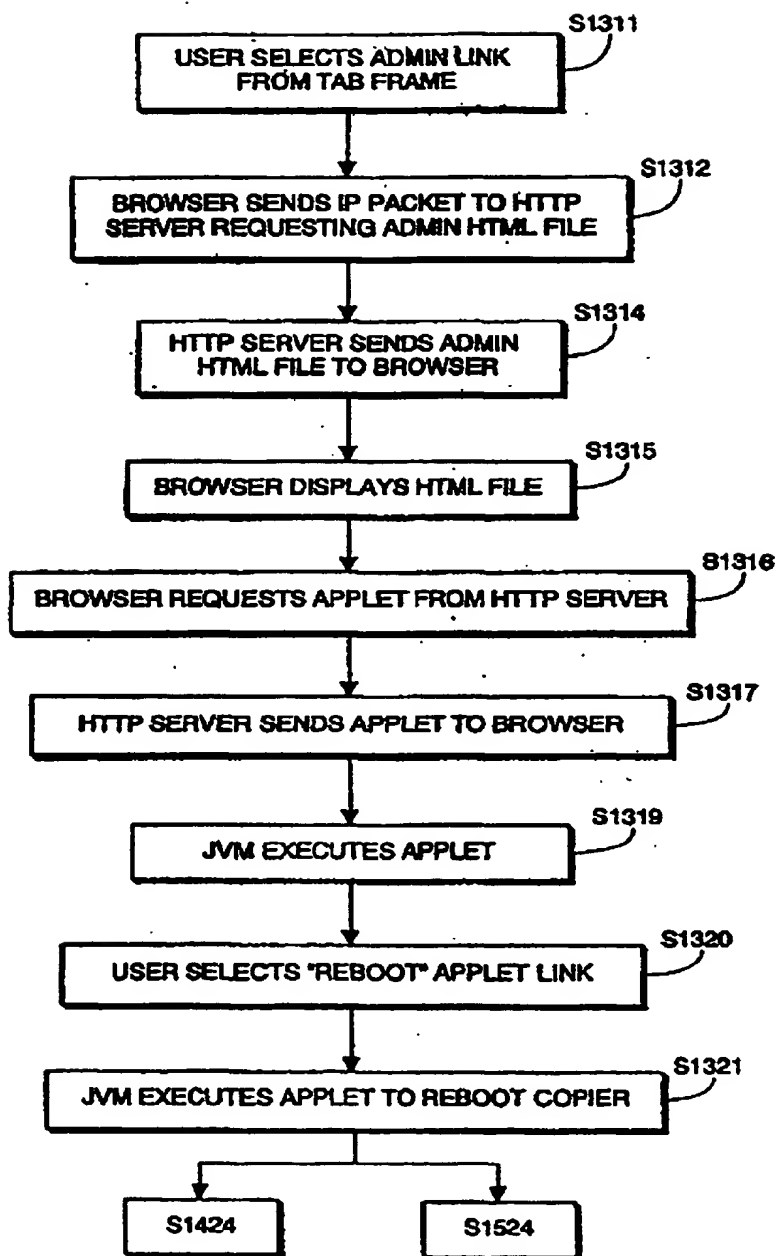


FIG. 13B

EP 0 843 230 B1

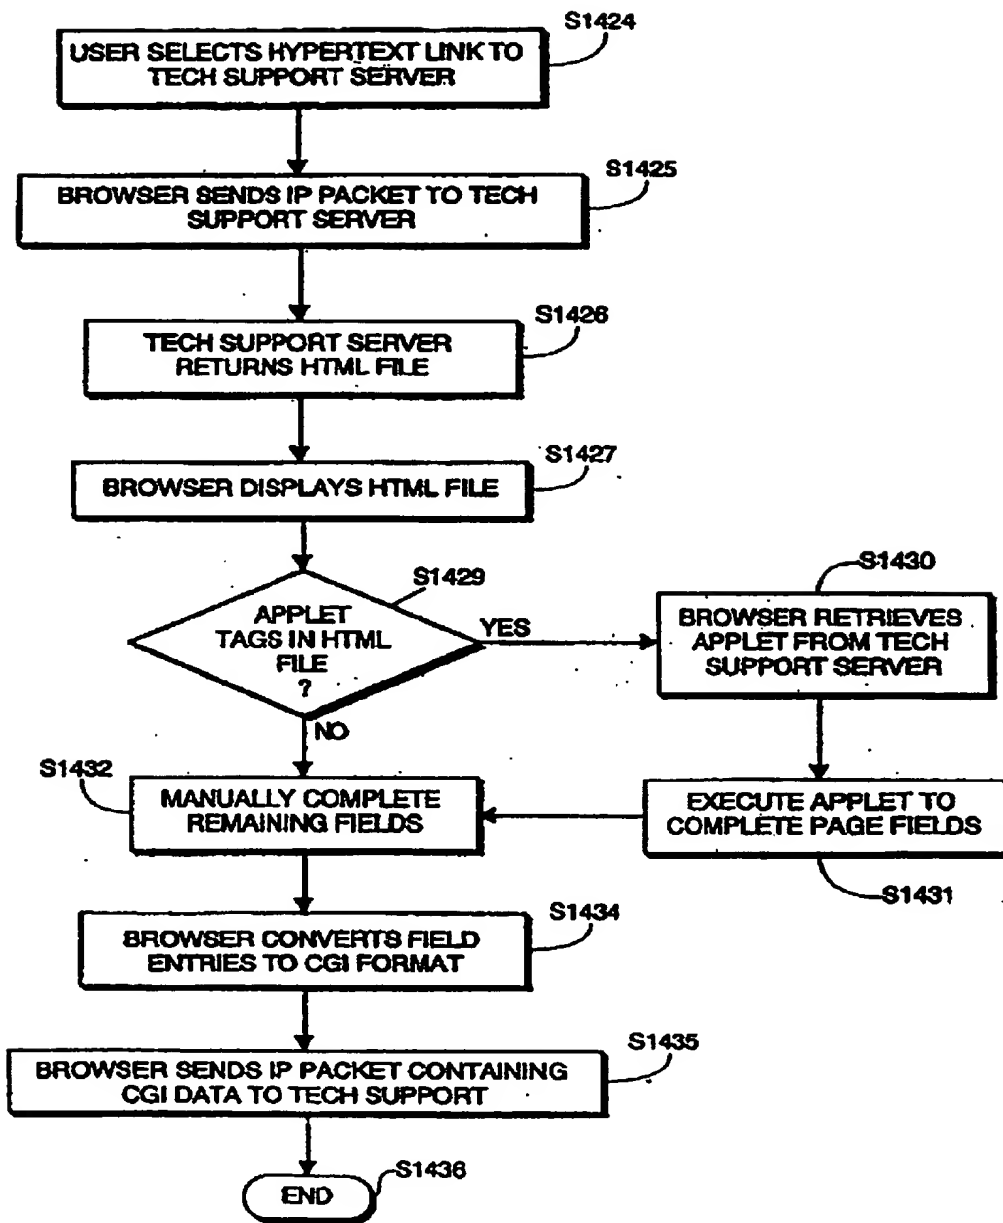


FIG. 14

EP 0 843 230 B1

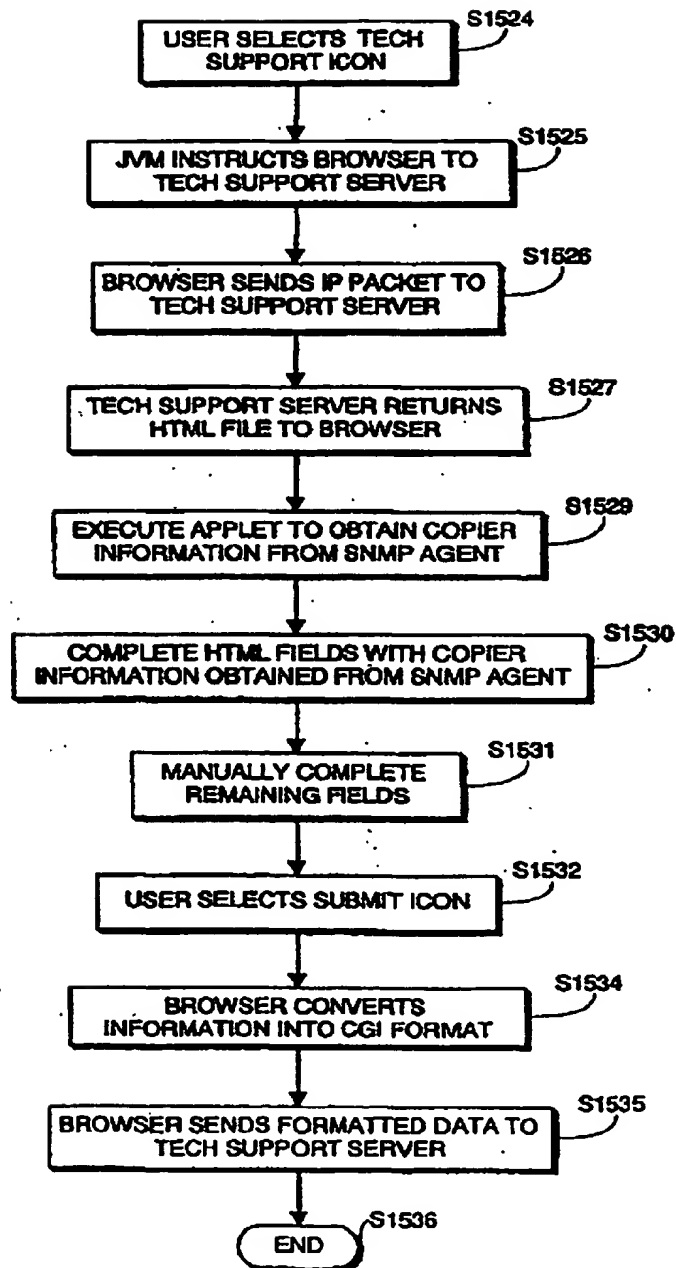


FIG. 15



EP 0 843 230 B1

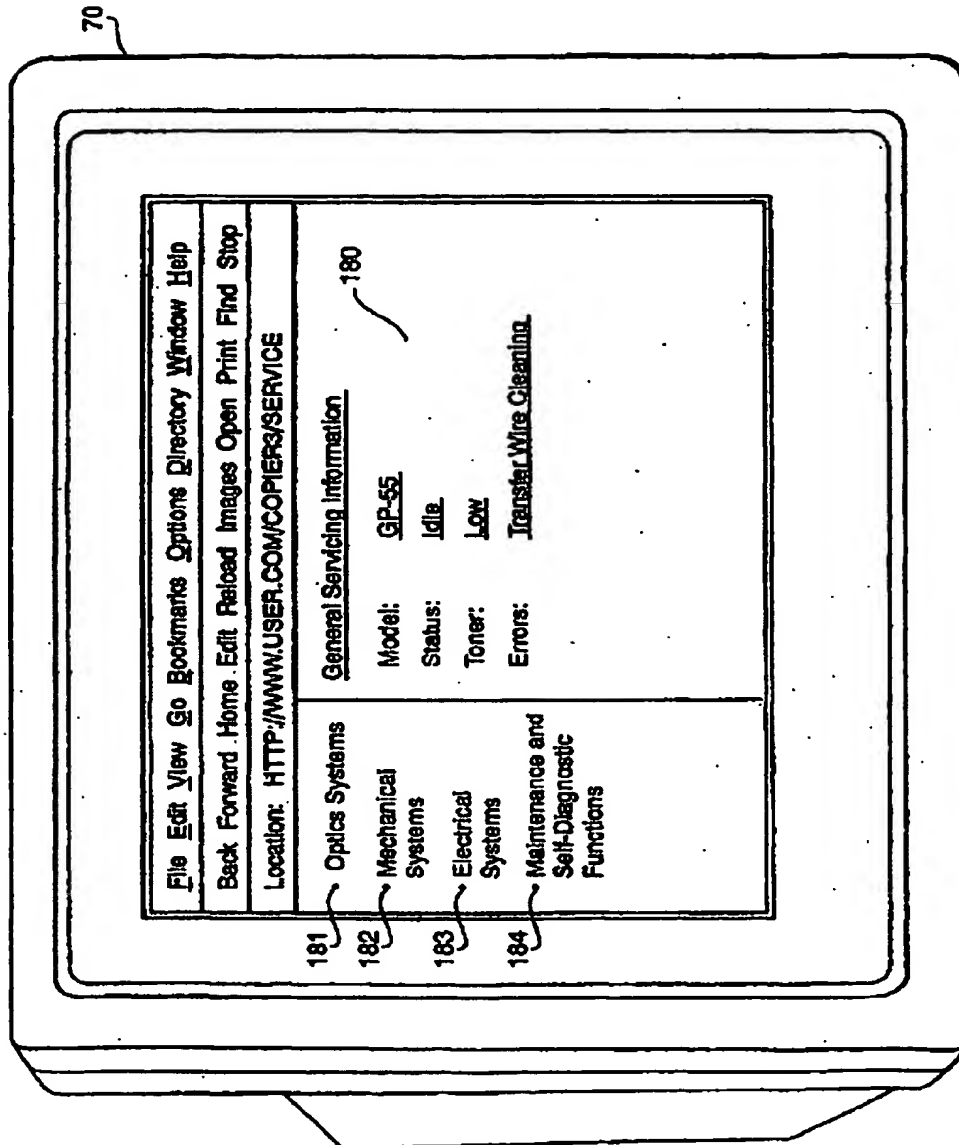


FIG. 16

EP 0 843 230 B1

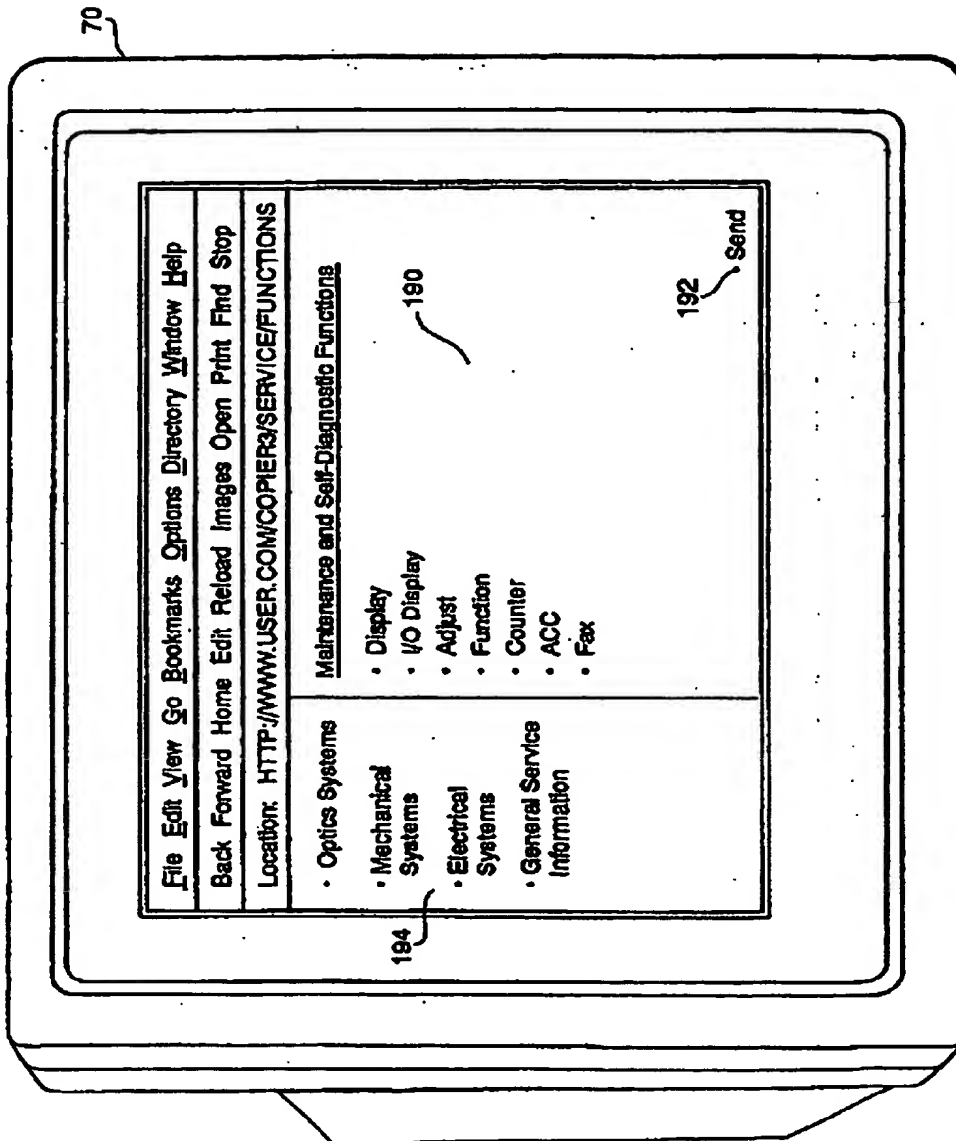


FIG. 17

EP 0 843 230 B1

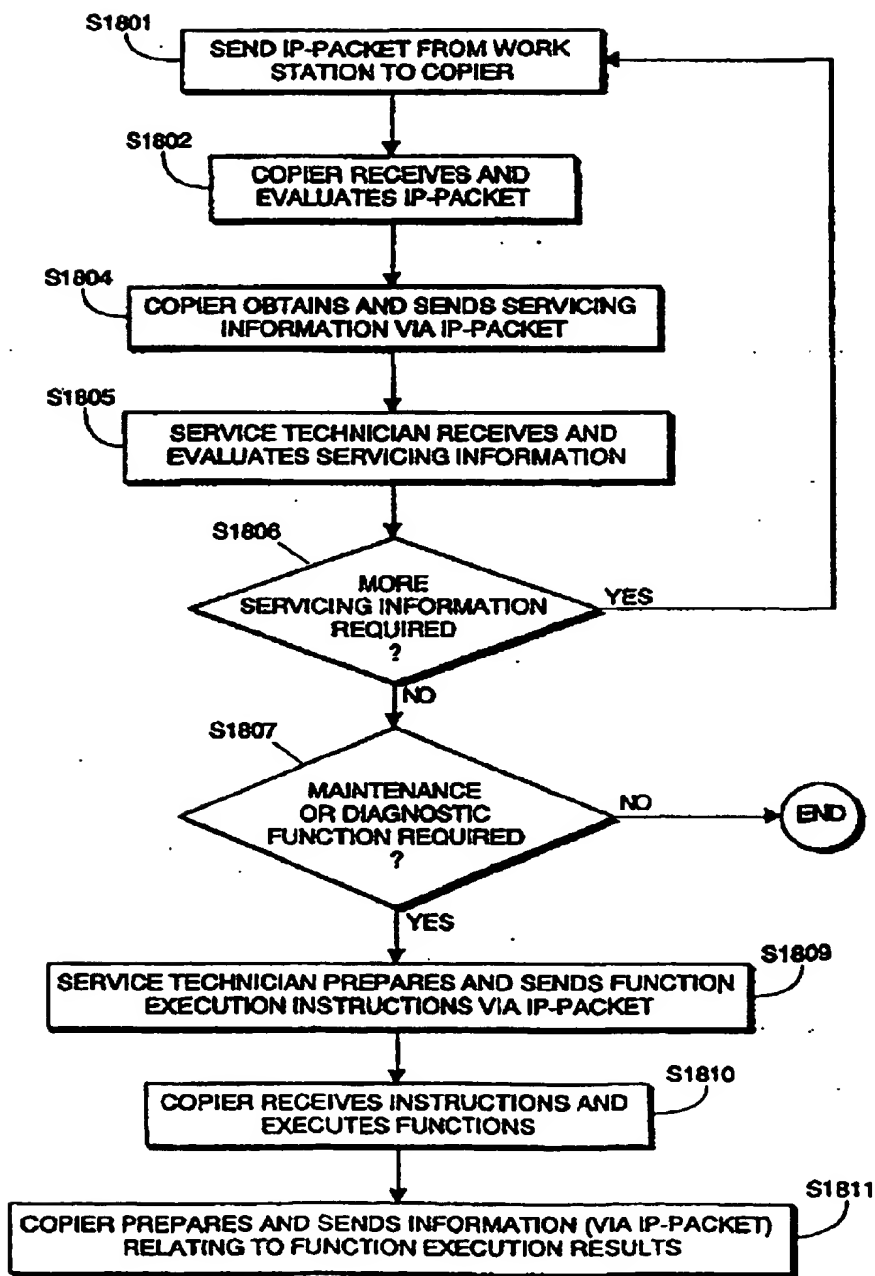


FIG. 18

EP 0 843 230 B1

70

202

File Edit View Go Bookmarks Options Directory Window Help

Back Forward Home Edit Reload Images Open Print Find Stop

Location: HTTP://WWW.USER.COM/COPIER3/REQUEST

Link to Printer

Contact Name: John Smith 201

Company Name: Canon Information Systems, Inc.

Phone Number: 714-488-7100

City: Costa Mesa State: CA

Zip: 92626 Country: USA

When is the best time to reach you? •Morning •Afternoon •Evening

Briefly Describe the Problem: Lifter Motor Alarm Error

FIG. 19

EP 0 843 230 B1

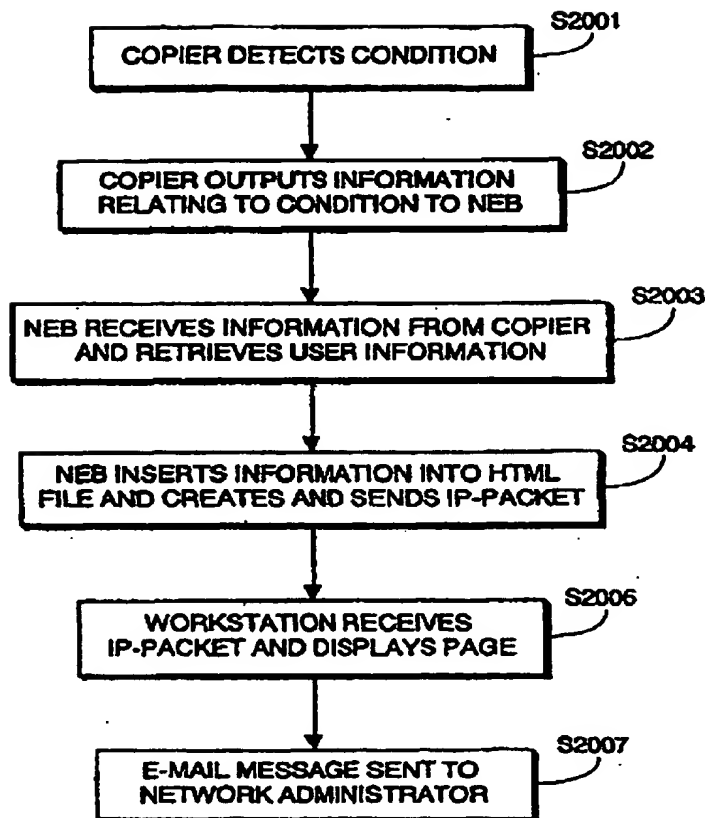


FIG. 20